

Nec M311W

NEC M311W



The Nec M311W LCD projector has 3100 Ansi lumens, a contrast of 2000:1 and a WXGA 1280 x 800 resolution. The manufacturer Nec specifies a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours of daily use. The integrated media player allows files to be played directly. The projector can illuminate an image width of up to 566 cm thanks to its 3100 Ansi lumens. In room lighting, however, the picture width should ideally be less than 377 cm. Playing 1080P is also no problem for the projector. The model was built by Nec in 2013 and is no longer current, but is still a popular projector in our database.

 3 x 0,59" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Projector	3100	Screen	1240 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off		2000:1 full on/off
Black Level Offset	1,5500 min. Lumen		0,621 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

HDTV 1920 x 1080 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: JPEG

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

230 / 140W im Eco Mode Lamp

Articel Nr.: NP16LP / 60003120

4000 h. 8000 h. in Eco Mode

14,29% / 0,06 €

Manual


Manual 1,69

F=1,7-2,2 f=17,5-29,0 mm

1,3-2,2:1

1 x 10W Mono

HDMI
2 x D-sub 15 pi in
S-video in
Cinch Video in
Cinch Stereo in

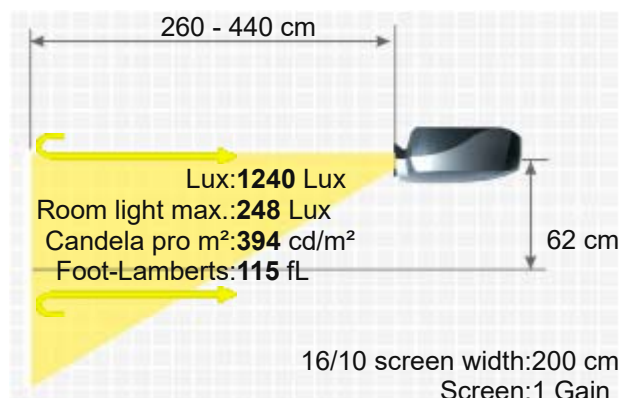

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Mini Jack Audio in
RJ45 in
USB Typ A, B
Yes
311 / 239W in Eco Mode
339 x 99 x 257 mm (13,3"x3,9"x10,1") 8,63 L/dm³
35 / 29 dB in Eco Mode

Weight
Keystone
Illumination

2,99 kg / 6,59 lbs.
Vert.: +/-30° automatisch
-

Frequenz

H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts

115 fL / max. 566 cm screen width
394 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Password protection
- Remote control with mouse control
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Digital Zoom
- DICOM Simulation

Optional

Lamp original NP16LP / 60003120
Remote control original Alternative zu: 7N900921 / 7N900927 / RD-448E
Air filter package original 24J37801 & 24J37811 & 24J37821 & 24J37831

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=21595>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2012-10-31 14:33:21



More Details



<https://www.projector-database.com/pro/necm311w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

