

Nec NP4100W

NEC NP4100W



Brief Introduction

Beta 2.5

A brief introduction to the NP4100W: The Nec stationary BrilliantColor DLP projector offers 5500 Ansi lumens, a contrast of 2100:1 and a WXGA 1280 x 800 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 753 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 502 cm here. Furthermore, the projector can play 1080P without any problems. The model was built by Nec in 2009 and is no longer current.

Display Type

1 x 0,65" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

5500 / 2700 im Eco Mode 2200 Lux (bei 200 cm Screen)

Contrast

2100:1 full on/off 2100:1 full on/off

Black Level

2,6190 min. Lumen 1,049 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10%

Resolution

WXGA 1280 x 800
1.024.000 Pixel
UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

2 x 280W Lamp
Articel Nr.: NP12LP
2000 h. 3000 h. in Eco Mode

Operating Costs

10,37% / 0,34 €

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

2 x 3W Stereo

Connections

DVI-D mit HDCP in
D-sub 15pin in und out
5 x BNC RGBHV in
YUV in
S-Video in
Cinch Video in
Mini Jack Audio in und out
RS232C

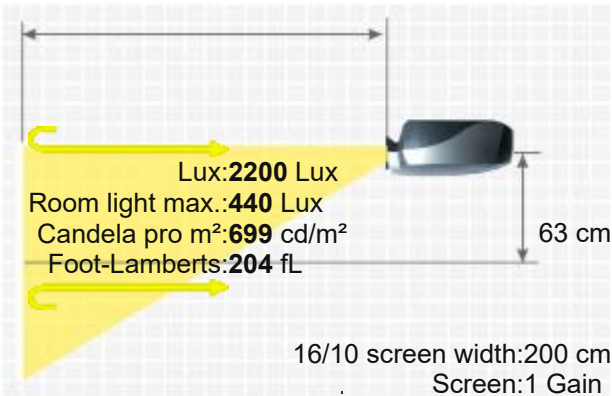

USB Typ B
RJ45
12V Trigger out



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
710 / 580W in Eco Mode
505 x 197 x 385 mm (19,9"x7,8"x15,2") 38,3 L/dm³
35 / 33 dB in Eco Mode

Weight
Keystone
Illumination

17,50 kg / 38,58 lbs.
Vert.: +/-40°
Hori.: +/-27°
-

Frequenz

H-sync: 15-90 kHz
V-sync: 50-85 Hz

Foot-Lamberts


204 fL / max. 753 cm screen width
699 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Eco Mode
- sRGB
- 24/7 continuous operation capable
- Password protection
- BrilliantColor™
- Remote control with laser pointer und mouse control
- Lan network compatible.
- 6-segment colour wheel technology.

Features

Osram bulb only	NLMP19059
Lamp ruby	Ruby-LMP19059
Lamp incl. air filter original	NP12LP / 60002748
Compatible lamp	LMP-K19059
Universal Remote original	Fernb-uni-V3
Object lens original	NP07ZL / 50032201
Object lens original	NP08ZL / 50032212
Object lens original	50032200 / NP06FL
Object lens original	50032213 / NP09ZL
Object lens original	50032214 / NP10ZL
Remote control original	79TD5521
Ceiling Mount 220	Halterung45

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n22303>

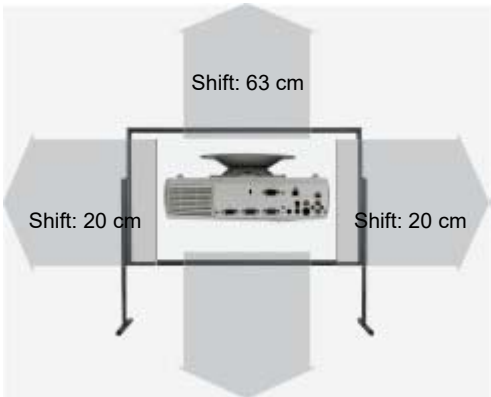

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP10ZL	4.52-8.52:1	9-17 m	50%	+/-10%	Powered


NP09ZL	2.3-4.58:1	4.6-9.2 m	50%	+/-10%	Powered
NP08ZL	1.82-2.4:1	3.6-4.8 m	50%	+/-10%	Powered
NP07ZL	1.36-1.83:1	2.7-3.7 m	50%	+/-10%	Powered

Fix Optional Lenses

NP06FL	0.81:1	1.6 m	0.0% Fix	No Zoom
--------	--------	-------	----------	---------

Status2009 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

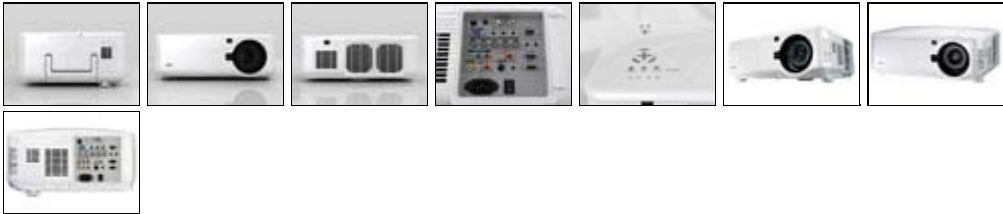

More Details



HCinema

<https://www.projector-database.com/pro/necnp4100w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.