

Nec NP-ME453X

NEC NP-ME453X



With the NP-ME453X, manufacturer Nec offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 16000:1. The manufacturer Nec specifies a lamp life of 12000 hours, which is over 16.4 years with two hours of use per day. The horizontal and vertical keystone correction allows the projector to be positioned very freely. The projector can illuminate a picture width of 597 cm well. Rooms with residual light can be created by the projector with a smaller image width, max. 398 cm is recommended here. The model is also Full HD 1080P compatible. The model was built by Nec in 2021 and is no longer current. It should also be noted that there are unfortunately no more replacement lamps for the projector, neither originals nor replicas.

Brief Introduction

Beta 2.5

Display Type

1 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

4700

1567 Lux (bei 200 cm Screen)

Contrast

16000:1

16000:1

Black Level

0,2938 min. Lumen

0,098 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

240W Boost /180W im Normal Eco

Light Source

Mode Lamp

Articel Nr.: NP47LP

Light Life

8000 h. Boost/ 12000 h. in Normal Eco Moe

Operating Costs

-

Focus

Manual

Zoom

Manual 1,7

Objective

F=1,7-2,2 f=17,4-29 mm

Throw Ratio


1,3-2,2:1

Audio

16W

Connections

2 x HDMI in HDCP (v2.0)
D-sub 15pin in und out
Cinch Video in

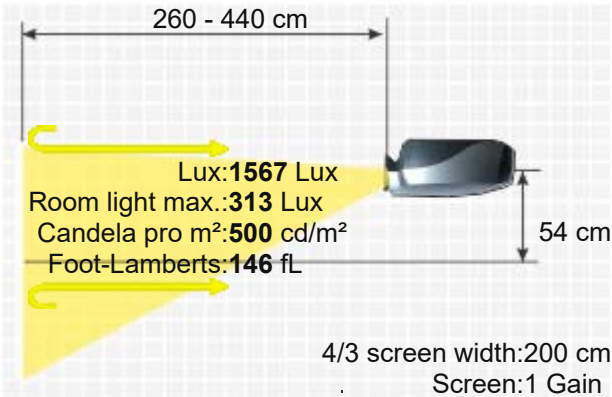

Cinch Stereo in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 in
Ceiling Mounting Yes
Power -
Size WxHxD 345 x 108,4 x 261 mm (13,6"x4,3"x10,3") 9,72 L/dm³
Operating Noise 37 / 29 dB in Eco Mode



Weight 3,20 kg / 6,61 lbs.
Keystone Vert.: +/-30° automatisch
Hori.: +/-30°
Illumination -

Frequenz H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 146 fL / max. 597 cm screen width
500 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Optional Wi-Fi network compatible.
- Lan network compatible.

Status 2021 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2021-04-28 12:04:21

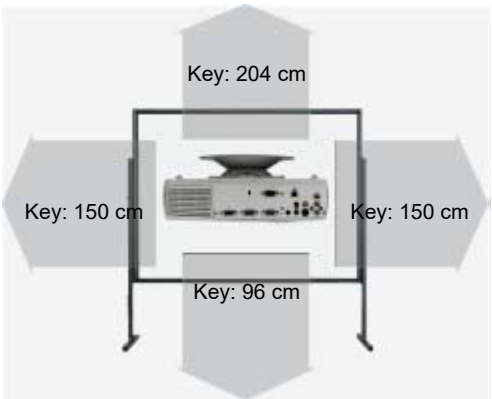

More Details



HCinema

<https://www.projector-database.com/pro/necnpme453x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.