

VEGA MFG LTD.

# New Year Proposal for 2012



## Breakthrough to become the distributor of ASK Proxima Projector



### Hong Kong Head Office

21/F, Wyler Centre Phase II, 192-200 Tai Lin Pai Road,  
Kwai Chung, New Territories. Hong Kong  
Tel +852 2310 1138 Fax +852 2310 2068  
E-mail [general@vegamfg.com.hk](mailto:general@vegamfg.com.hk)

## About ASK Proxima

ASK Proxima is a well-established projector brand with nearly 30 years of experience in the industry. Founded in 1984, the Norwegian ASK was the R&D leader in LCD technology. In 1991, the ASK brand was taken over by Tandberg Data, the world's leading memory products manufacturer at the time. By collaborating with Polaroid, together with the aggressive marketing campaign; "For Polaroid – By ASK" succeeded in building up a strong distribution network throughout Europe and Asia.

ASK acquired its competitor, Proxima Corporation in 1998 and later entered the US market with its new name "Proxima ASA". 5 years later, it was ranked the second largest leader in the projector industry. Thereafter, it was renamed as "ASK Proxima" after the company had merged with the industry leader, InFocus Corporation.

In 2010, ASK Proxima teamed up with the Projector manufacturer, AMT. Since then, ASK Proxima has strengthened its presence and made a strong comeback with its comprehensive range of high quality and stylish projectors.

## Why become a Distributor of ASK Proxima Projectors?

1. Enhance your business image by carrying a well-established and reputed brand.
2. Increase your sale volumes by selling projectors bundled with projection screens or even mounts
3. Offer an extensive line of projectors e.g. pocket, large venue tailor-made for different markets to get more market share
4. Increase your profits from purchasing high quality products at attractive prices
5. Bring in new customers
6. Consolidate your existing client base
7. Satisfy specific requirement from customers such as tender by providing custom-made projectors

# **ASK Proxima co.,LIMITED**

Room 3,21/F.,Far East Consortium Building,121 Des Voeux Road Central,HK.

---

Date: 15/11/2011

Our Ref.: AP20111101

## **LETTER OF APPOINTMENT**

### **TO: WHOM IT MAY CONCERN**

We hereby certify that ASK PROXIMA CO., LIMITED, having its principal place of business at Room 3, 21/F, Far East Consortium Building, 121 Des Voeux Road Central, HK. is pleased to confirm the appointment of

VEGA MFG. LTD.

21/F, WYLER CENTRE PHASE II, 192-200 TAI LIN PAI ROAD,

KWAI CHUNG, NT. HONG KONG

As our Exclusive Distributor (Exclusive Representative/Sole Representative) for developing the market in the designated countries for the product designed and manufactured by

### **ASK Proxima Projectors**

Effective Date of Appt : 15/11/2011

Period of Validity : *Two years*

Sincerely,

Name:



Designation: Sales Director

For and on Behalf of ASK PROXIMA CO., LIMITED

# ASK Proxima Co., LIMITED

Room 3,21/F., Far East Consortium Building, 121 Des Voeux Road Central, HK.

## Designated Territories:

|                        |            |                |            |           |             |                          |
|------------------------|------------|----------------|------------|-----------|-------------|--------------------------|
| France                 | Poland     | Denmark        | Portugal   | Colombia  | Hong Kong   | Brunei                   |
| Netherlands            | Hungary    | Norway         | Spain      | Venezuela | Macao       | Malaysia                 |
| Belgium                | Slovakia   | Iceland        | Greece     | Guyana    | Japan       | The United Arab Emirates |
| Luxembourg             | Czech      | United Kingdom | Italy      | Suriname  | Singapore   | Israel                   |
| Switzerland            | Bulgaria   | Sweden         | Vatican    | Ecuador   | Bangladesh  | Jordan                   |
| Liechtenstein          | Romania    | Lithuanian     | Andorra    | Peru      | Taiwan      | Kenya                    |
| Austria                | Moldova    | Latvia         | Macedonia  | Argentina | Korea       | Uganda                   |
| Monaco                 | Montenegro | Estonia        | San Marino | Bolivia   | Vietnam     | Tunisia                  |
| Germany                | Serbia     | Ireland        | Malta      | Chile     | Philippines | Kuwait                   |
| Mexico                 | Kosovo     | New Zealand    | Slovenia   | Paraguay  | Sri Lanka   | Saudi Arabia             |
| Bosnia and Herzegovina | Albania    | Australia      | Croatia    | Uruguay   | Oman        |                          |



# ASK Proxima



## C2000 series

C2225

C2355

C2455

C2317W


C2317



## ■ SPECIFICATIONS

|                      | C2225                                                                                                                                                                                                                                                                                                     | C2317                                                             | C2355             | C2455             | C2317W                              |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|-------------------|-------------------|-------------------------------------|
| Display Technology   | Liquid Crystal Display                                                                                                                                                                                                                                                                                    |                                                                   |                   |                   |                                     |
| Display Panel        | 3×0.63"                                                                                                                                                                                                                                                                                                   |                                                                   |                   |                   | 3×0.59"                             |
| Brightness           | 2,600 Ansi Lumens                                                                                                                                                                                                                                                                                         | 3,100 Ansi Lumens                                                 | 3,500 Ansi Lumens | 4,000 Ansi Lumens | 3,100 Ansi Lumens                   |
| Native Resolution    | XGA (1024x768)                                                                                                                                                                                                                                                                                            |                                                                   |                   |                   | WXGA (1280x800)                     |
| Contrast Ratio       | 600:1                                                                                                                                                                                                                                                                                                     | 2500:1                                                            | 600:1             | 2500:1            | 2500:1                              |
| Projection Lens      | F:2.3~2.5, 1.2x optics, f=18.82~22.60mm, 1/4~16Digital Zoom                                                                                                                                                                                                                                               |                                                                   |                   |                   |                                     |
| Uniformity           | 85%                                                                                                                                                                                                                                                                                                       |                                                                   |                   |                   |                                     |
| Throw Ratio          | 70" @2.07M                                                                                                                                                                                                                                                                                                |                                                                   |                   |                   | 70" @2.19M                          |
| Throw Distance       | 0.8M~10.8M(30"~300")                                                                                                                                                                                                                                                                                      |                                                                   |                   |                   |                                     |
| Aspect Ratio         | 4:3 (Standard) / 16:9(Compatible)                                                                                                                                                                                                                                                                         |                                                                   |                   |                   | 16:10 (Standard) / 4:3 (Compatible) |
| Keystone             | Auto Keystone, ±30°                                                                                                                                                                                                                                                                                       |                                                                   |                   |                   |                                     |
| Input                | VGA*2; YCbCr; Video; S-Video; Audio in(mini jack); RCA(L/R)                                                                                                                                                                                                                                               | HDMI; VGA*2; YCbCr; Video; S-Video; Audio in(mini jack); RCA(L/R) |                   |                   |                                     |
| Output               | VGA(INPUT2); Audio out(Mini-Jack)                                                                                                                                                                                                                                                                         |                                                                   |                   |                   |                                     |
| Control              | RS232                                                                                                                                                                                                                                                                                                     | RS232 / RJ45                                                      |                   |                   |                                     |
| PC Compatibility     | VGA, SVGA, XGA, SXGA, WXGA, UXGA, Mac                                                                                                                                                                                                                                                                     |                                                                   |                   |                   |                                     |
| Video Compatibility  | PAL / SECAM / NTSC / NTSC4.43 / PAL-M / PAL-N & 035i / 720p / 575p / 480p / 575i / 480i / 1080i / 1080p                                                                                                                                                                                                   |                                                                   |                   |                   |                                     |
| Lens Shift H         | No                                                                                                                                                                                                                                                                                                        |                                                                   |                   |                   |                                     |
| Lens Shift V         | No                                                                                                                                                                                                                                                                                                        |                                                                   |                   |                   |                                     |
| Lamp                 | 230W USHIO                                                                                                                                                                                                                                                                                                |                                                                   |                   |                   |                                     |
| Lamp Life            | (Normal)3000H / (Eco)4000H                                                                                                                                                                                                                                                                                |                                                                   |                   |                   |                                     |
| Remote Control       | Yes                                                                                                                                                                                                                                                                                                       |                                                                   |                   |                   |                                     |
| H-Synch Range        | 15~100KHz                                                                                                                                                                                                                                                                                                 |                                                                   |                   |                   |                                     |
| V-Synch Range        | 48~120Hz                                                                                                                                                                                                                                                                                                  |                                                                   |                   |                   |                                     |
| Standby Power        | <1W                                                                                                                                                                                                                                                                                                       |                                                                   |                   |                   |                                     |
| Power Consumption    | 280W                                                                                                                                                                                                                                                                                                      |                                                                   |                   |                   |                                     |
| Power Supply         | 100-240V AC @ 50-60 Hz                                                                                                                                                                                                                                                                                    |                                                                   |                   |                   |                                     |
| Operating Temp.      | 5°C~35°C / (41°F~95°F)                                                                                                                                                                                                                                                                                    |                                                                   |                   |                   |                                     |
| Store Temp.          | -10°C~60°C / (14°F~140°F)                                                                                                                                                                                                                                                                                 |                                                                   |                   |                   |                                     |
| OSD Languages        | 17 languages<br>English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Portuguese, Hungarian, Romanian, Russian, Thai, Indonesian, Arabic, Turkish                                                                                                                               |                                                                   |                   |                   |                                     |
| Speaker              | Stereo 2x3W                                                                                                                                                                                                                                                                                               |                                                                   |                   |                   |                                     |
| Dimension            | 327*241*87mm                                                                                                                                                                                                                                                                                              |                                                                   |                   |                   |                                     |
| Weight               | 2.9Kg                                                                                                                                                                                                                                                                                                     |                                                                   |                   |                   |                                     |
| Standard Accessories | User Manual (CD), Power Cord, Remote Control & battery, VGA Cable, Carrying Bag, Lens Cover With String, Warranty Card, Drying agent, Certificate card                                                                                                                                                    |                                                                   |                   |                   |                                     |
| Other Features       | 1. One-key Blank Screen.<br>2. Image zoom out/in.<br>3. Anti-theft Bar&lock/Triple Password Protection<br>4. Image Freezing, Zoom & Panning<br>5. Auto Power-Off on Singal Soucring Failure<br>6. Auto Detection of Input Source<br>7. Auto Synch.<br>8. Lamp&Filter countdown<br>9. High-speed Power off |                                                                   |                   |                   |                                     |

## ■ CONNECTION PANEL



C2225



C2317/C2355/C2455/C2317W

## ■ PROJECTION DISTANCE

| Model                  | C2225     |           | C2317/ C2355/ C2455 |           | C2317W    |           |
|------------------------|-----------|-----------|---------------------|-----------|-----------|-----------|
| Projection size [inch] | Wide (mm) | Tele (mm) | Wide (mm)           | Tele (mm) | Wide (mm) | Tele (mm) |
| 30                     | 875       | 1054      | 873                 | 1052      | 936       | 1128      |
| 40                     | 1174      | 1413      | 1172                | 1411      | 1255      | 1511      |
| 50                     | 1473      | 1771      | 1471                | 1770      | 1574      | 1895      |
| 60                     | 1772      | 2130      | 1771                | 2130      | 1894      | 2278      |
| 70                     | 2070      | 2489      | 2070                | 2489      | 2213      | 2661      |
| 80                     | 2369      | 2848      | 2369                | 2848      | 2532      | 3044      |
| 90                     | 2668      | 3206      | 2668                | 3207      | 2851      | 3428      |
| 100                    | 2967      | 3565      | 2967                | 3567      | 3171      | 3811      |
| 120                    | 3565      | 4282      | 3566                | 4278      | 3809      | 4578      |
| 150                    | 4461      | 5358      | 4464                | 5363      | 4767      | 5728      |
| 200                    | 5955      | 7152      | 5960                | 7159      | 6363      | 7645      |
| 250                    | 7449      | 8945      | 7456                | 8956      | 7960      | 9561      |
| 300                    | 8944      | 10739     | 8952                | 10752     | 9556      | 11478     |


# ASK Proxima



## DLP series

L1035

L1035W

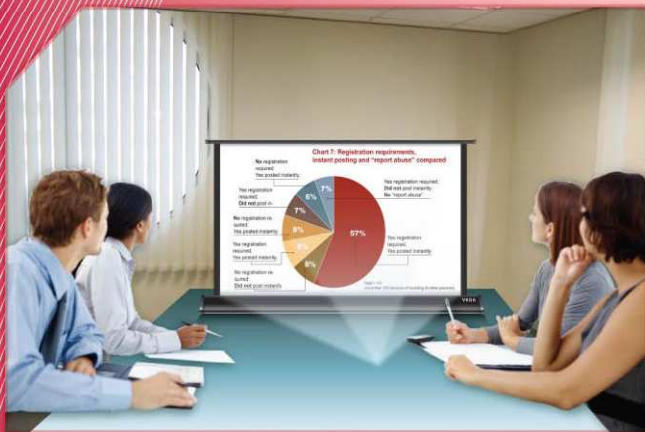

## ■ SPECIFICATIONS

|                      | L1035                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | L1035W            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| Display Technology   | DLP (0.45" DMD)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                   |
| Display Panel        | DDP6400                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                   |
| Brightness           | 200 Ansi Lumens                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                   |
| Native Resolution    | 858x600                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                   |
| Contrast Ratio       | 1000:1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                   |
| Projection Lens      | Manual Focus Lens                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                   |
| Uniformity           | 80%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                   |
| Throw ratio          | 36"@1.5M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 40"@1M            |
| Throw Distance       | 0.5M-5M(12"-120")                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.5M-5M(20"-200") |
| Aspect Ratio         | 4:3(Standard) / 16:9(Compatible)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                   |
| Keystone             | Auto Keystone, ±40°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                   |
| Input                | VGA, Video, Audio In(Mini Jack), USB-A Slot, SD Card Slot                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |
| Output               | Audio Out(Mini Jack)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                   |
| Control              | Mini USB-B slot                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                   |
| PC Compatibility     | VGA, SVGA, XGA, SXGA, Mac                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |
| Video Compatibility  | NTSC, PAL, SECAM, 565P, 576P, 576i, 480P, 480i                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                   |
| Lens Shift H         | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                   |
| Lens Shift V         | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                   |
| Lamp                 | LED module, PT39 Type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                   |
| Lamp Life            | 30,000 hrs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                   |
| Remote Control       | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                   |
| H-Synch Range        | 15-90 KHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |
| V-Synch Range        | 50-80 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                   |
| Standby Power        | 1W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                   |
| Power Consumption    | <90W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                   |
| Power Supply         | 100V - 240V @ 50-60Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                   |
| Operating Temp.      | 5°C-35°C / (41°F-95°F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                   |
| Store Temp.          | -20°C-60°C / (7°F-140°F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                   |
| OSD Languages        | 1.system - 11 language:<br>Simplified Chinese, English, German, Japanese, Spanish, Portugal, Russian, Arabic, Vietnam, Italian, Afrikaans<br>2.PMP - 9 language:<br>Simplified Chinese, English, German, Japanese, Spanish, Portugal, Russian, Italian, Afrikaans                                                                                                                                                                                                                                                                  |                   |
| Speaker              | 1*3W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                   |
| Dimension            | 172X134X50mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                   |
| Weight               | 0.8Kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                   |
| Standard Accessories | Power Cable, Power Adapter, VGA(D-Sub) Cable, Remote Control with Battery, User Manual(CD), Soft packing bag,<br>Quick Start Card, Warranty Card, Certificate card                                                                                                                                                                                                                                                                                                                                                                 |                   |
| Other Features       | 1. 200 Max ANSI Lumens Brightness<br>2. High-contrast ratio 1000:1<br>3. Truly portable-Lightweight only 0.8KG<br>4. DLP with LED light source Display Technology,<br>5. New "RGB" mix light to increase the color saturation<br>6. LED light source lasts over 30,000 hours<br>7. Built-in stereo to increase the multimedia magic<br>8. Use the heat emitter + Fan for cool, can keep the same temperature for 24hrs;<br>9. Built in multimedia player, can play Video/Audio/Picture/Text files from USB memory stick/SD card... |                   |

## ■ CONNECTOR PANEL



L1035/L1035W

## ■ PROJECTION DISTANCE

| Model                  | L1035         |
|------------------------|---------------|
| Projection size [inch] | Distance (mm) |
| 12                     | 500           |
| 24                     | 1000          |
| 36                     | 1500          |
| 48                     | 2000          |
| 60                     | 2500          |
| 72                     | 3000          |
| 84                     | 3500          |
| 96                     | 4000          |
| 108                    | 4500          |
| 120                    | 5000          |

| Model                  | L1035W        |
|------------------------|---------------|
| Projection size [inch] | Distance (mm) |
| 20                     | 500           |
| 40                     | 1000          |
| 60                     | 1500          |
| 80                     | 2000          |
| 100                    | 2500          |
| 120                    | 3000          |



### Exclusive Representative: Vega Manufacturing Limited

21/F, Wyler Centre Phase II, 192-200 Tai Lin Pai Road,  
Kwai Chung, New Territories, Hong Kong

Tel: +852 2310 1138

Fax: +852 2310 2068

Email: generalm@vegamfg.com.hk

Website: www.vegamfg.com.hk



# ASK Proxima



## E1655 series

E1655U

E1655

E1655W



## ■ SPECIFICATIONS

|                      | E1655                                                                                                                                                                                                                                                                                                                                          | E1655W                              | E1655U                                                                                     |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------------------------------------------|
| Display Technology   | Liquid Crystal Display                                                                                                                                                                                                                                                                                                                         |                                     |                                                                                            |
| Display Panel        | 3×0.79"                                                                                                                                                                                                                                                                                                                                        | 3×0.75"                             | 3×0.76"                                                                                    |
| Brightness           | 6500 Ansi Lumens                                                                                                                                                                                                                                                                                                                               | 6,000 Ansi Lumens                   | 5000 Ansi Lumens                                                                           |
| Native Resolution    | XGA (1024×768)                                                                                                                                                                                                                                                                                                                                 | WXGA (1280×800)                     | WUXGA (1920×1200)                                                                          |
| Constrast Ratio      | 1000:1                                                                                                                                                                                                                                                                                                                                         | 1000:1                              | 1000:1                                                                                     |
| Projection Lens      | 1:1.6X, F=1.7~2.2, f=22~35mm,<br>1/2x1/2~4x4 Digital Focus                                                                                                                                                                                                                                                                                     |                                     |                                                                                            |
| Uniformity           | 90%                                                                                                                                                                                                                                                                                                                                            |                                     |                                                                                            |
| Throw Ratio          | 60" @1.58M                                                                                                                                                                                                                                                                                                                                     | 60" @1.66M                          |                                                                                            |
| Throw Distance       | 0.8M~17.3M(30"~400")                                                                                                                                                                                                                                                                                                                           | 0.8M~13.6M(30"~300")                |                                                                                            |
| Aspect Ratio         | 4:3 (Standard) / 16:9(Compatible)                                                                                                                                                                                                                                                                                                              | 16:10 (Standard) / 4:3 (Compatible) |                                                                                            |
| Keystone             | Manual Keystone:±30°                                                                                                                                                                                                                                                                                                                           |                                     |                                                                                            |
| Input                | HDMI*1, VGA*2, BNCx5, S-Video, YCbCr*1, Video*1;RCA(L/R);<br>Audio*1(mini jack)                                                                                                                                                                                                                                                                |                                     | HDMI*1, VGA*2, BNCx5, S-Video,<br>YCbCr*1, Video*1;<br>RCA(L/R); Audio*1(mini jack); DVI-D |
| Output               | VGA(INPUT2); Audio out(Mini-Jack)                                                                                                                                                                                                                                                                                                              |                                     |                                                                                            |
| Control              | RS232 / RJ45                                                                                                                                                                                                                                                                                                                                   |                                     |                                                                                            |
| PC Compatibility     | VGA, SVGA, XGA, SXGA, WXGA, UXGA                                                                                                                                                                                                                                                                                                               |                                     |                                                                                            |
| Video Compatibility  | PAL / SECAM / NTSC / NTSC4.43 / PAL-M / PAL-N 1080i / 1035i / 720p / 575p / 480p / 575i / 480i /<br>1080p24,1080p25,1080p30,1080p50,1080p60                                                                                                                                                                                                    |                                     |                                                                                            |
| Lens Shift H         | ±10% (Powered)                                                                                                                                                                                                                                                                                                                                 |                                     |                                                                                            |
| Lens Shift V         | ±50% (Powered)                                                                                                                                                                                                                                                                                                                                 |                                     |                                                                                            |
| Lamp                 | 330W USHIO                                                                                                                                                                                                                                                                                                                                     |                                     |                                                                                            |
| Lamp Life            | (Normal)4000H / (Eco)6000H                                                                                                                                                                                                                                                                                                                     |                                     |                                                                                            |
| Remote Control       | Yes                                                                                                                                                                                                                                                                                                                                            |                                     |                                                                                            |
| H-Synch Range        | 15~100 KHz                                                                                                                                                                                                                                                                                                                                     |                                     |                                                                                            |
| V-Synch Range        | 48~120Hz                                                                                                                                                                                                                                                                                                                                       |                                     |                                                                                            |
| Standby Power        | <1W                                                                                                                                                                                                                                                                                                                                            |                                     |                                                                                            |
| Power Consumption    | 450W                                                                                                                                                                                                                                                                                                                                           |                                     | 480W                                                                                       |
| Power Supply         | 100V – 240V @ 50~60 Hrsz                                                                                                                                                                                                                                                                                                                       |                                     |                                                                                            |
| Operating Temp.      | 5°C-35°C / (41°F-95°F)                                                                                                                                                                                                                                                                                                                         |                                     |                                                                                            |
| Store Temp.          | -10°C~60°C / (14°F~140°F                                                                                                                                                                                                                                                                                                                       |                                     |                                                                                            |
| OSD Languages        | 17 languages<br>English,German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Portuguese, Hungarian,<br>Romanian, Russian, Thai, Indonesian, Arabic, Turkish                                                                                                                                                                  |                                     |                                                                                            |
| Speaker              | Mono 7W                                                                                                                                                                                                                                                                                                                                        |                                     |                                                                                            |
| Dimension            | 535X390X190mm                                                                                                                                                                                                                                                                                                                                  |                                     |                                                                                            |
| Weight               | 10.8kg                                                                                                                                                                                                                                                                                                                                         |                                     |                                                                                            |
| Standard Accessories | User Manual (CD), Power Cord, Remote Control & battery, VGA Cable, Lens Cover With String, Warranty Card,<br>Drying agent, Certificate card                                                                                                                                                                                                    |                                     |                                                                                            |
| Other Features       | 1. 360° Projector<br>2. One Touch change Lens<br>3. High-speed Power off<br>4. Auto image reversal<br>5.Colorboards(greenboard, Redboard, blueboard, yellowboard)<br>6. Blackboard (Green)<br>7. Blankscreen Hotkey<br>8. Close Caption<br>9. Image zoom out/in.<br>10. Image pan<br>11. Top Cover Lamp Replacement<br>12. Anti-theft Bar/lock |                                     |                                                                                            |

## ■ CONNECTOR PANEL



E1655/E1655W



E1655U

## ■ PROJECTION DISTANCE

| Model | E1655    |           | E1655W/ E1655U |           |
|-------|----------|-----------|----------------|-----------|
|       | Wide(mm) | Tele (mm) | Wide(mm)       | Tele (mm) |
| 30    | 768.4    | 1255.8    | 809            | 1320.8    |
| 40    | 1039.4   | 1690.4    | 1093.4         | 1777.1    |
| 50    | 1310.3   | 2124.9    | 1377.9         | 2233.4    |
| 60    | 1581.2   | 2559.5    | 1662.3         | 2689.6    |
| 70    | 1852.1   | 2994.1    | 1946.8         | 3145.9    |
| 80    | 2123.1   | 3428.6    | 2231.2         | 3602.1    |
| 90    | 2394     | 3863.2    | 2515.6         | 4058.4    |
| 100   | 2664.9   | 4297.7    | 2800.1         | 4514.6    |
| 120   | 3206.7   | 5166.9    | 3369           | 5427.1    |
| 150   | 4019.5   | 6470.6    | 4222.3         | 6795.9    |
| 200   | 5374.1   | 8643.4    | 5644.5         | 9077.1    |
| 250   | 6728.7   | 10816.2   | 7066.7         | 11358.4   |
| 300   | 8083.3   | 12989.1   | 8488.9         | 13639.6   |

# ASK Proxima




## Short Throw **S2000** series

S2335

S2295

S2325W

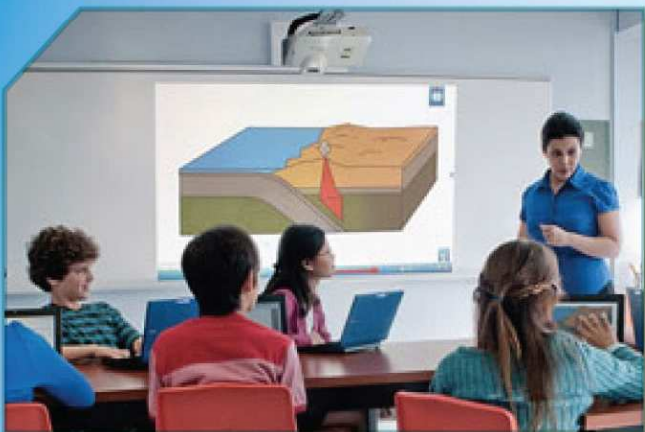

## ■ SPECIFICATIONS

|                     | S2295                                                                                                                                                                                                                                                                                                     | S2335             | S2325W                              |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------------------|
| Display Technology  | Liquid Crystal Display                                                                                                                                                                                                                                                                                    |                   |                                     |
| Display Panel       | 3x0.63"                                                                                                                                                                                                                                                                                                   |                   | 3x0.59"                             |
| Brightness          | 2,800 Ansi Lumens                                                                                                                                                                                                                                                                                         | 3,200 Ansi Lumens | 3,100 Ansi Lumens                   |
| Native Resolution   | XGA (1024 x 768)                                                                                                                                                                                                                                                                                          |                   | WXGA (1280 x 800)                   |
| Constrast Ratio     | 2000:1                                                                                                                                                                                                                                                                                                    |                   |                                     |
| Projection Lens     | F=1.8,f=9.02mm                                                                                                                                                                                                                                                                                            |                   |                                     |
| Uniformity          | 85%                                                                                                                                                                                                                                                                                                       |                   |                                     |
| Throw Ratio         | 82"@1m                                                                                                                                                                                                                                                                                                    |                   | 77"@1m                              |
| Throw Distance      | 0.51~2.56m(40"~300")                                                                                                                                                                                                                                                                                      |                   | 0.636-4.020m(40"~300")              |
| Aspect Ratio        | 4:3 (Standard) / 16:9(Compatible)                                                                                                                                                                                                                                                                         |                   | 16:10 (Standard) / 4:3 (Compatible) |
| Keystone            | Manual Keystone:±30°                                                                                                                                                                                                                                                                                      |                   |                                     |
| Input               | HDMI; VGA*2; YCbCr; Video; S-Video; Audio in(mini jack); RCA(L/R)                                                                                                                                                                                                                                         |                   |                                     |
| Output              | VGA(INPUT2)                                                                                                                                                                                                                                                                                               |                   |                                     |
| Control             | RS232 / RJ45                                                                                                                                                                                                                                                                                              |                   |                                     |
| PC Compatibility    | VGA, SVGA, XGA, SXGA, WXGA, UXGA, Mac                                                                                                                                                                                                                                                                     |                   |                                     |
| Video Compatibility | PAL, SECAM, NTSC 4.43, PAL-M, PAL-N, HDTV(480i, 480p, 575i, 575p, 720p, 1035i, 1080i and 1080P)                                                                                                                                                                                                           |                   |                                     |
| Lens Shift H        | No                                                                                                                                                                                                                                                                                                        |                   |                                     |
| Lens Shift V        | No                                                                                                                                                                                                                                                                                                        |                   |                                     |
| Lamp                | 230W                                                                                                                                                                                                                                                                                                      |                   |                                     |
| Lamp Life           | 3000 Hrs(Norm) / 4000 Hrs(Eco)                                                                                                                                                                                                                                                                            |                   |                                     |
| Remote Control      | Yes                                                                                                                                                                                                                                                                                                       |                   |                                     |
| H-Synch Range       | 15~100 KHz                                                                                                                                                                                                                                                                                                |                   |                                     |
| V-Synch Range       | 48~120Hz                                                                                                                                                                                                                                                                                                  |                   |                                     |
| Standby Power       | <1W                                                                                                                                                                                                                                                                                                       |                   |                                     |
| Power Consumption   | 280W                                                                                                                                                                                                                                                                                                      |                   |                                     |
| Power Supply        | 100V ~ 240V @ 50-60Hz                                                                                                                                                                                                                                                                                     |                   |                                     |
| Operating Temp.     | 5℃~35℃                                                                                                                                                                                                                                                                                                    |                   |                                     |
| Store Temp.         | -10℃~60℃ / (14°F~140°F)                                                                                                                                                                                                                                                                                   |                   |                                     |
| OSD Languages       | 17 languages<br>English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Portuguese, Hungarian, Romanian, Russian, Thai, Indonesian, Arabic, Turkish                                                                                                                               |                   |                                     |
| Speaker             | Stereo 2x3W                                                                                                                                                                                                                                                                                               |                   |                                     |
| Dimension           | 361.5x314.2 x 92mm                                                                                                                                                                                                                                                                                        |                   |                                     |
| Weight              | 3.7Kg                                                                                                                                                                                                                                                                                                     |                   |                                     |
| Standard            | User Manual (CD), Power Cord, Remote Control & battery, VGA Cable, Warranty Card, Drying agent, Certificate card                                                                                                                                                                                          |                   |                                     |
| Other Features      | 1. One-key Blank Screen<br>2. Image zoom out/in<br>3. Anti-theft Bar & lock/Triple Password Protection<br>4. Image Freezing, Zoom & Panning<br>5. Auto Power-Off on Signal Sourcing Failure<br>6. Auto Detection of Input Source<br>7. Auto Synch.<br>8. Lamp&Filter countdown<br>9. High-speed Power off |                   |                                     |

## ■ CONNECTION PANEL



S2295, S2335 & S2325W

## ■ PROJECTION DISTANCE

| Model                  | S2295/S2335   | S2325W        |
|------------------------|---------------|---------------|
| Projection size [inch] | Distance (mm) | Distance (mm) |
| 50                     | 598           | 636           |
| 60                     | 726           | 771           |
| 70                     | 864.7         | 918.1         |
| 80                     | 988.2         | 1049.3        |
| 90                     | 1111.7        | 1180.4        |
| 100                    | 1236          | 1313          |
| 120                    | 1482.3        | 1573.9        |
| 150                    | 1875          | 1990          |
| 180                    | 2223.5        | 2360.9        |
| 200                    | 2513          | 2666          |
| 250                    | 3088.1        | 3279.0        |
| 280                    | 3458.7        | 3672.5        |
| 300                    | 3789          | 4020          |