




# A3000 SERIES



ASK Proxima A3000 digital multimedia projector series provides meeting room presenters with XGA or WXGA Widescreen resolution, up to 3500 lumens and the true-to-life colors of DLP® with BrilliantColor™ technology. Featuring DisplayLink™ content-over-USB the A3000 series are lightning fast to setup and connect, require zero screen-switching or toggling and offer multiple display connectivity through USB 2.0. Engineered to be Wireless-Ready with LiteShow II these projectors also host HDMI and RS-232 ports to connect and communicate with any meeting room source or control device.

## Just the Facts

<b>3000-3500 Lumens</b>	bright images in high ambient light environments
<b>Output sources</b>	Monitor Loop-thru (HD15), Audio Out, Wireless Ready Port
<b>Lamp life</b>	3000 norm, 4000 eco offers a lower operating cost
<b>BrilliantColor™ Technology</b>	brighter, more realistic colors
<b>DLP® Technology</b>	superior reliability and lower total cost of ownership
<b>Resolution</b>	XGA 1024 x 768 or WXGA 1280 x 800
<b>Warranty</b>	exclusive 3 year parts & labor warranty, 1 year lamp warranty
<b>Security</b>	Kensington lock compatible and PIN code feature

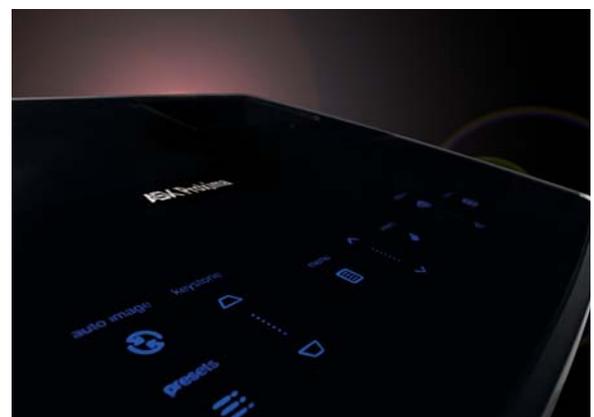

The top surface of the A3000 series features LiteTouch™ control panel. Devoid of buttons, this sleek glossy case is backlit to reveal a full array of functionality. When not in use the keypad subtly blends in to any conference table and automatically dims when ceiling mounted.

## TECHNICAL SPECIFICATIONS\*

Native Resolution	<b>3300</b> - WXGA 1280 x 800, <b>3200</b> - XGA 1024x768, <b>3100</b> - XGA 1024x768
Max Resolution	<b>3300</b> - WUXGA 1920 x 1200 ** <b>3200/3100</b> - UXGA 1600x1200
Display Technology	Texas Instruments DLP® Technology .55" LVDS DDP2230 /w BrilliantColor™
Input Sources	2 x D-sub HD15, S video, Composite Video, DisplayLink, HDMI 4 x Audio in (3.5mm & R/L, HDMI, DisplayLink)
Output Sources	Monitor Loop-thru (HD15), Audio Out, Wireless Ready Port
Control	RS232, USB, Keypad, Remote
Supported Aspect Ratio	<b>3100/3200</b> - 4:3(default), 5:4, 16:9, 16:10 <b>3300</b> - 16:10 (default), 16:9, 4:3, 5:4
Computer Compatibility	PC, Macintosh
Video Compatibility	NTSC/NTSC4.43/PAL-M/PAL-N/SECAM and SDTV(480i/576i), EDTV(480p/576p), HDTV(720p/1080i/1080p)
Brightness	<b>3100, 3300</b> - 3000 max ANSI Lumens, 2400 eco <b>3200</b> - 3500 Max ANSI Lumens, 2800 eco
Contrast Ratio	2000:1
Number of Colors	16.7 Million, True color
Image Offset	115%
Throw Ratio (distance/width)	<b>3300</b> - 1.56-1.72:1 <b>3100/3200</b> - 1.95 - 2.15:1
Projection distance	<b>3300</b> - 5.11' - 36.15' (1.5m - 11m) <b>3100/3200</b> - 6.39' - 36.15' (1.95m - 11m)
Projection Methods	Front, Rear, Ceiling Front, Ceiling Rear
Zoom Ratio	1.1:1
Synch	H-Synch Range 15.75 - 100; V-Synch Range 50 - 85
Digital Keystone Correction	Auto Keystone +/-30 degrees Vertical
Image Size (diagonal)	39" - 200" (1 - 5.13m)
Audio	3w+3w
Closed Caption	CC1, CC2
Product Dimensions	3.7" H x 12.4" W x 9.8" D (9.5cm-H x 31.6cm-W x 24.9cm-D)
Product Weight	7 lbs (3.1kg)
Product Color	Black with Silver
Power Supply	100-240 Volts at 50-60 Hz
Power Consumption	Normal 288w; Eco 228w; Standby 7w
Lamp Power	230w
Lamp Life	<b>3100, 3300</b> - 3000 hrs normal (4000 eco mode)*** <b>3200</b> - 2000 hrs normal (3000 eco mode)
Shipping Dimensions	13.1" H x 18.8" L x 8.8" W (33.3 cm-H x 47.8 cm-L x 22.4 cm-W)
Shipping Weight	14.3 lbs (6.4kg)
Audible Noise	<b>3100/3300</b> - 33 dBA Typical : Normal / 28 dBA Typical : Eco <b>3200</b> - 35 dBA Typical : Normal / 30 dBA Typical : Eco
Max Altitude	10,000 ft
Operating Temperature	41-95° F (5-35° C) from sea level to 10,000' (3,098 m)
Ships with	Power Cord, USB Cable (A - B mini), VGA Cable, Carry Case, Remote with batteries
Menu Languages	English, French, German, Italian, Korean, Portuguese, Russian, Spanish, Trad Chinese, Simple Chinese, Norwegian, Swedish, Finnish, Danish, Polish, Turkish, Dutch
Warranty	3 years with 24x7 operation compatible
Lamp Rupture Containment	Tested to >0.8mm****
Lamp Warranty	1 years
Accessories Warranty	90 days
DLP Chip Warranty	5 years
Approvals	C-Tick mark (Australia) NOM certification (Mexico), CE (Europe), UL & CUL (USA and Canada), FCC (USA), IRAM (Argentina), GOST (Russia), MIC & eK (South Korea), CCC (China), PSB (Singapore)
Security	Kensington slot, Pin code



### LiteShow II

This wireless adaptor enables cable-free presentations through any of the ASK Proxima A3000 projector series. Switch presenters in seconds and transmit data, audio and stunning video over a 300' (95m) range.

### Warranty

Providing the highest quality products and support is very important to InFocus. Just one reason why the A3000 series of digital projectors come standard with a 3-year limited factory warranty (including parts and labor) and a 12 month limited lamp-replacement warranty. Extended product & lamp warranty programs are also available. For more information about warranty and service programs in your region, please visit: [www.infocus.com/service](http://www.infocus.com/service)

### Optional Accessories

- Projection Screens (4:3, 16:10 & 16:9)
- Cables & Adaptors
- Security Lock (SEC-LOCK-01)
- LiteShow II Wireless Adapter (IN-LITESHOW2)
- Replacement Lamp A3100/ A3300 (SP-LAMP-041)
- Replacement Lamp A3200 (SP-LAMP-042)

\* Product specifications, terms, and offerings are subject to change at any time without notice.

\*\* Resolution support may be product specific.

\*\*\* Actual lamp life may vary based on the ambient environment and projector usage. Conditions that may affect lamp life include temperature, altitude, and rapidly switching the projector on and off

\*\*\*\* Tested to contain particles larger than the specified size in any dimension.

# ASK Proxima

[www.askproxima.com](http://www.askproxima.com)

InFocus Corporate Headquarters: 27500 SW Parkway Avenue  
Wilsonville, Oregon 97070-9215, USA • Phone: (1) 503-685-8888  
(1) 800-294-6400 • Fax: (1) 503-685-8887

In Europe: InFocus International BV • Louis Armstrongweg 110 • 1311 RL Almere  
The Netherlands • Phone: (31) 36 539 2000 • Fax: (31) 36 5392999  
Freephone: 008000 4636287 (008000 INFOCUS)

In Asia: 19 Tanglin Road • 7th Floor  
Singapore 247909 • Telephone: (65) 6334-9005 • Fax: (65) 6333-4525

