

Optoma EzPro / EP782/W

OPTOMA EZPRO / EP782/W



Brief Introduction

Beta 2.5

The Optoma model EzPro / EP782/W is a DLP projector with XGA 1024 x 768 resolution and a contrast of 3000:1. The projector will be able to illuminate a picture width of 597 cm well. Rooms with residual light can be created by the projector with a smaller image width, max. 398 cm is recommended here. The model is also Full HD 1080P compatible. The model was built by Optoma in 2008 and is no longer current, but is still one of the very popular projectors.



1 x 0,7" DC3 DDR DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

4700 / 4100 im Eco Mode

3000:1 full on/off

1,5667 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

330W Lamp

Articel Nr.: SP.88B01GC01

2000 h. 3000 h. in Eco Mode

Manual

Manual 1,2

F=2,52-2,79 f=22,55-27,06 mm

1,57-1,89:1


2 x 3W

HDMI in
DVI-D mit HDCP in
2 x D-sub 15 pin in und out
S-Video in
Cinch Video in
5 x Mini Jack Stereo in
RS232C Din 9 pin
RJ45 in

1567 Lux (bei 200 cm Screen)

3000:1 full on/off

0,523 min. Lumen

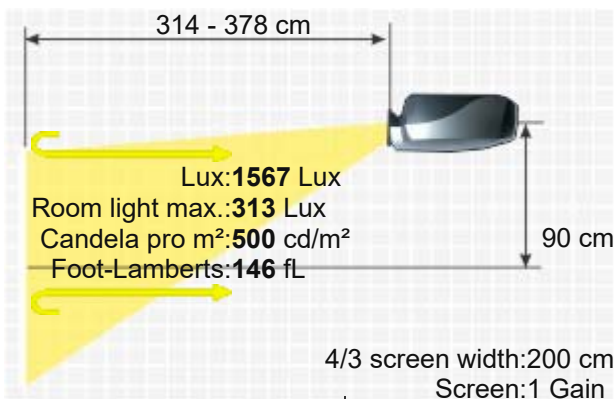

12V Trigger out



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
460 / 400W in Eco Mode
398 x 132 x 295 mm (15,7"x5,2"x11,6") 15,5 L/dm³
32 / 30 dB in Eco Mode

Weight
Keystone
Illumination

5,00 kg / 11,02 lbs.
Vert.: +/-18°
85%

Frequenz

H-sync: 15-91 kHz
V-sync: 50-85 Hz

Foot-Lamberts

146 fL / max. 597 cm screen width
500 cd/m²

- Full HD 1080P compatible
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Digital image shift
- Password protection
- Remote control with laser pointer und mouse control
- Control via web browser
- Lan network compatible.
- Overscan adjustable

Features

Optional

Bulb only Philips	NLMP18363
Lamp ruby	Ruby-LMP18363
Lamp original	BL-FP330A / SP.88B01GC01
Compatible lamp	LMP-K18363
Remote control original	45.88B01G001
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18363>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Short Throw Lens	1.3-1.57:1	2.6-3.1 m	60% Fix		Manual
Long Throw Lens	2.04-2.46:1	4.1-4.9 m	60% Fix		Manual

Status 2008 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomaep782-en.html>