

Optoma H180X

OPTOMA H180X



A brief introduction to the Optoma H180X. The standard portable DLP projector has a WXGA 1280 x 800 resolution and a contrast of 18000:1. The lamp in the projector is specified with a lamp life of 6500 hours, which is over 8.9 years if enjoyed for two hours a day. Due to the brightness of 3000 Ansi lumens, a picture width of 556 cm is possible. In room light, the picture should be max. 371 cm wide. The projector can also play 1080P and 3D without any problems. The operating noise of just 28 decibels makes the projection quiet. The model was built by Optoma in 2013 and is no longer current.

Brief Introduction Beta 2.5

Display Type



1 x 0,65" DC3 DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1200 Lux (bei 200 cm Screen)

Contrast

18000:1 full on/off

18000:1 full on/off

Black Level

0,1667 min. Lumen

0,067 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

-

Light Life

Articel Nr.: SP.8VF01GC01 / BL-FP190B

6500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,5-2,67 f=21,8-23,98 mm

Throw Ratio

1,55-1,7:1

Audio

1 x 2W

Connections

HDMI 1.4 in


D-sub 15 pin in

S-Video in

Cinch Video in

Mini Jack Audio in und out

RS232C

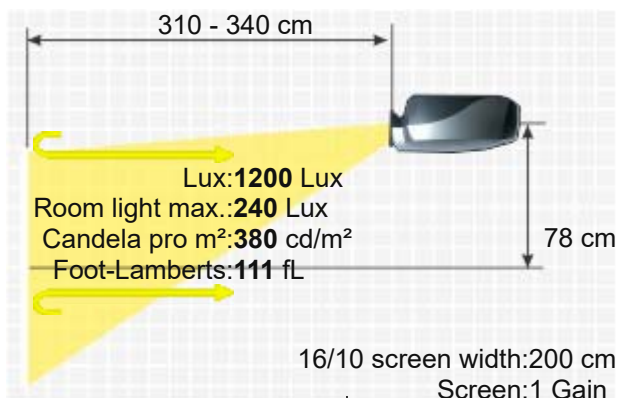

Ceiling Mounting Yes
Power 233 / 207W in Eco Mode
Size WxHxD 286 x 84 x 192 mm (11,3"x3,3"x7,6") 4,61 L/dm³
Operating Noise 28dB

Weight 2,20 kg / 4,85 lbs.
Keystone Vert.: +/-40°
Illumination 80%

Frequenz H-sync: 153,9-91,1 kHz
V-sync: 24-85 Hz

Foot-Lamberts 111 fL / max. 556 cm screen width
380 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Blackboard Modus
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Password protection
 - BrilliantColor™

Optional Lamp original SP.8VF01GC01 / BL-FP190B
Remote control original BR-5043N, BR-5046L, OP.45.8QJ01G001, BR-5048N

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22055>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-08-14 14:12:42



Data



More Details



HCinema

<https://www.projector-database.com/pro/optomah180x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.