

Optoma HD800X

OPTOMA HD800X



A brief introduction to the HD800X: The Optoma home cinema DLP projector offers 1200 Ansi lumens, a contrast of 5000:1 and an HDTV 1920 x 1080 resolution. Thanks to the brightness of 1200 Ansi lumens, a picture width of 352 cm is possible. In room light, the image should be max. 235 cm wide. Furthermore, the projector can play 1080P without any problems. The projector is very quiet compared to others with 29 decibels of operating noise. The model was built by Optoma in 2008 and is no longer current, but is still a popular projector in our database.

Brief Introduction Beta 2.5

Display Type

1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

1200 533 Lux (bei 200 cm Screen)

Contrast

5000:1 full on/off 5000:1 full on/off

Black Level Offset

0,2400 min. Lumen 0,107 min. Lumen

Resolution

HDTV 1920 x 1080
2.073.600 Pixel
UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.
300W Lamp

Light Source

Article Nr.: BL-FS300B /
SP.83C01G.001

Light Life

3000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,20

Objective

-

Throw Ratio

1,85-2,22:1

Audio


Nein

Connections

2 x HDMI 1.3 in
DVI in
S-Video in
Cinch Video in
RS232C

Ceiling Mounting

12V Trigger out
Yes, is possible.

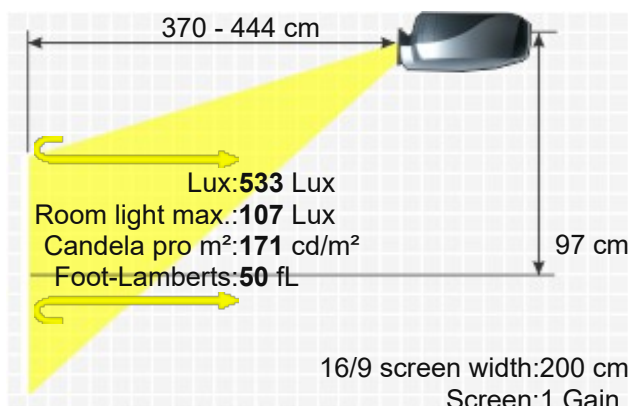

Power 395 / 14W standby
Size WxHxD 411 x 116 x 311 mm (16,2"x4,6"x12,2") 14,83 L/dm³
Operating Noise 29 / 27 dB in Eco Mode

Weight 4,50 kg / 9,92 lbs.
Keystone Vertical
Illumination -

Frequenz -

Foot-Lamberts 50 fL / max. 352 cm screen width
171 cd/m²

- Features
- Full HD 1080P compatible
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Gamma correction
 - Dynamic iris
 - Digital image shift
 - Overscan adjustable

Screen Mirroring Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads
In Test -

Optional accessories

	Nackte Osram Lampe	NLMP4887	103,58 €
	Lampe Ruby	Ruby-LMP4887	128,12 €
	Lampe Original	BL-FS300B / SP.83C01G.001	EOL €
	Kompatible Lampe	LMP-K16460	69,77 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2008 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomahd800x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.