

Optoma TW615 GOV

OPTOMA TW615 GOV



Brief Introduction

Beta 2.5

The standard portable TW615 GOV 3D BrilliantColor DLP has 3500 Ansi lumens, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. An image width of up to 601 cm is possible as the projector has 3500 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 401 cm is recommended. Furthermore, the projector can play 1080P without any problems. The model was built by Optoma in 2012 and is no longer current.

Display Type



1 x 0,65" DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

3500

1400 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

1,1667 min. Lumen

0,467 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

120Hz Frame Sequential 3D for Resolutions Up to 720p,

60Hz Field Sequential 3D for Resolutions Up to 480i

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

230W P-VIP Lamp

Articel Nr.: BL-FP230D /

SP.8EG01GC01

Light Life

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,4-2,66 f=18,2-21,8 mm

Throw Ratio

1,28-1,536:1

Audio

8W

Connections

HDMI in

2 x D-sub 15 pin in 1 x out


S-video in

Cinch Stereo in

Mini Jack in

RS232C

RJ45 in

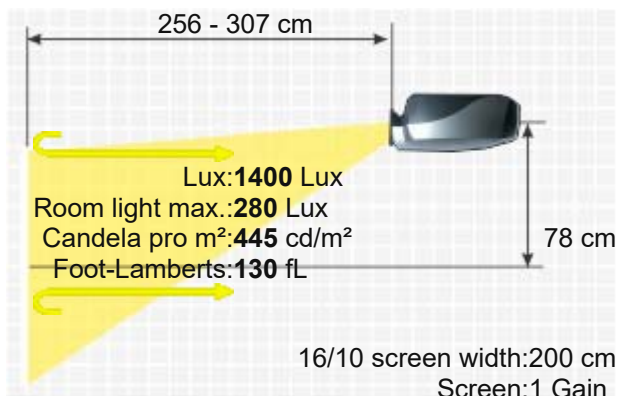

USB
12V Trigger out
Yes
328 / 272W in Eco Mode
324 x 97 x 234 mm (12,8"x3,8"x9,2") 7,35 L/dm³
31 / 29 dB in Eco Mode

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

2,90 kg / 6,39 lbs.
Vert.: +/-40°
85%

H-sync: 15,30-91,1 kHz
V-sync: 24-120 Hz

Frequenz

Foot-Lamberts

130 fL / max. 601 cm screen width
445 cd/m²

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Digital image shift
- Password protection
- BrilliantColor™
- Remote control with laser pointer
- Control via web browser
- Lan network compatible.

Features

Optional

Remote control original BR-5023L / BR-3057L / BR-5029L / BR-5030L / BR-5033L
Lamp original BL-FP230D / SP.8EG01GC01

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro20561>
2012 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/optomatw615gov-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.