

Optoma W351

OPTOMA W351



With the W351, manufacturer Optoma offers a DLP projector with WXGA 1280 x 800 resolution and a contrast of 20000:1. The lamp in the projector is specified with a lamp life of 6500 hours, which is over 8.9 years if enjoyed for two hours every day. 3800 Ansi lumens ensure that a picture width of 626 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 417 cm. It is also Full HD 1080P and 3D compatible. The model was built by Optoma in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65" DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

3800

1520 Lux (bei 200 cm Screen)

Contrast

20000:1 full on/off

20000:1 full on/off

Black Level

0,1900 min. Lumen

0,076 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

Articel Nr.: SP.70201GC01

Light Life

6500 h.

Operating Costs

4,76% / 0,02 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,5-2,67 f=21,8-23,98 mm

Throw Ratio


1,55-1,70:1

Audio

10W

Connections

HDMI 1.4a in
2 x D-sub 15pin in 1 x out
Cinch Video in
S-Video in
Mini Jack Audio in
RS232C Din 9 pin in
RJ45 in

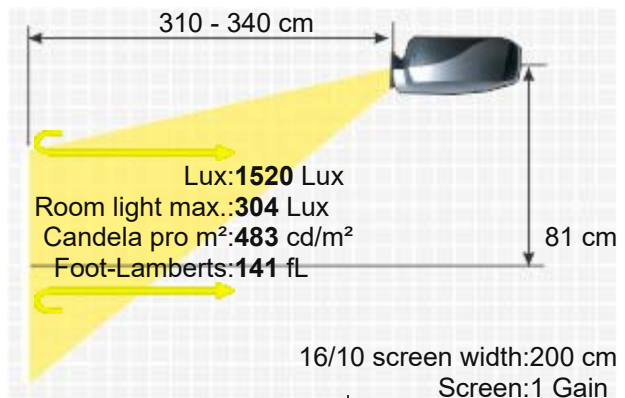

USB Typ B in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
225 / 191W in Eco Mode
314 x 102 x 224 mm (12,4"x4"x8,8") 7,17 L/dm³
29 dB in Eco Mode

Weight
Keystone
Illumination

2,50 kg / 5,51 lbs.
Vert.: +/-40°
85%

Frequenz

H-sync: 15,3-91,10 kHz
V-sync: 24-85 Hz

Foot-Lamberts

141 fL / max. 626 cm screen width
483 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Password protection
- Lan network compatible.

Optional

Lamp original SP.70201GC01 / SP.77011GC01 / BL-FP210A
Remote control original BR-5053C/BR-5080C/SP.72702GC01

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22993>
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2014-10-07 11:10:51

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomaw351-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

