

Optoma W354

OPTOMA W354



A brief introduction to the W354: The Optoma 3D BrilliantColor DLP projector offers 3400 Ansi lumens, a contrast of 18000:1 and a WXGA 1280 x 800 resolution. The manufacturer Optoma specifies a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours a day. Due to the brightness of 3400 Ansi lumens, a picture width of 592 cm is possible. In room light, the picture should be max. 395 cm wide. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. Video signals 1080P and 3D are also no problem for the projector. The model was built by Optoma in 2016 and is no longer current.



1 x 0,65" DC3 DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector
3400
18000:1 full on/off
0,1889 min. Lumen

Screen
1360 Lux (bei 200 cm Screen)
18000:1 full on/off
0,076 min. Lumen

WXGA 1280 x 800
1.024.000 Pixel
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)
Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

195W Lamp

Articel Nr.: SP.72G01GC01 / BL-FU195A

5000 h. 10000 h. in Eco Mode

7,14% / 0,03 €

Manual


Manual 1,29

F=2,5-2,78 f=16,91-21,6 mm

1,19-1,54:1

16W

2 x HDMI 1.4a mit MHL in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in

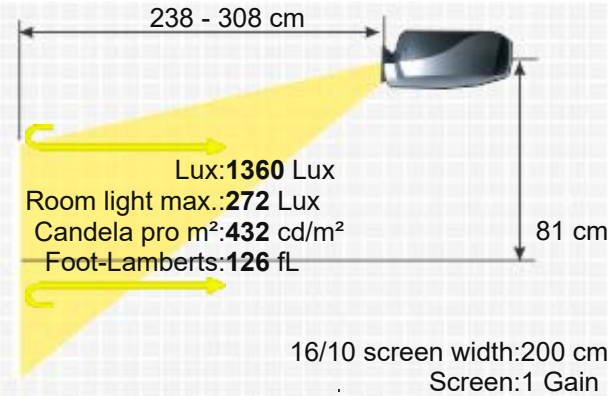

Mini Jack Audio in und out
 USB Typ A in
 RS232C Din 9 pin in
 RJ45 in



Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 225 / 187W in Eco Mode
 298 x 96,5 x 230 mm (11,7"x3,8"x9,1") 6,58 L/dm³
 29 dB in Eco Mode

Weight
 Keystone
 Illumination

2,52 kg / 5,56 lbs.
 Vert.: +/-40°
 75%

Frequenz

H-sync: 15,3-91,1 kHz
 V-sync: 24-85 Hz

Foot-Lamberts

126 fL / max. 592 cm screen width
 432 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- BrilliantColor™
- Remote control with laser pointer und mouse control
- Lan network compatible.

Optional

Lamp original SP.72G01GC01 / BL-FU195A
 Remote control original DE.5042048800, BR-5011L

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=9001141>
 2016 Discontinued (EOL) // Last update of the data: 2023-09-20
 Created: 2016-08-24 11:51:56

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomaw354-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

