

Avio MP 15E



AVIO MP 15E



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable Avio MP 15E LCD projector has 1100 Ansi lumens, a contrast of 400:1 full on/off and an XGA 1024 x 768 resolution. The projector can illuminate a picture width of up to 289 cm well thanks to the 1100 Ansi lumens. In room light, however, the image width should ideally be less than 193 cm. The projector is no longer sold by the manufacturer.



3 x 0,9" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

Projector

1100

400:1 full on / off

2,7500 min. Lumen

Screen

356 Lux (bei 203 cm Screen)

400:1 full on / off

0.897 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM, Y/C

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W Lamp

1500 h.

-

Manual

Manual 1,2

F=2,3-2,6 f=36-43,2 mm

1,97-2,36:1

1,5W x 1,5W

Cinch Video in

Cinch Stereo

S-Video in

D-sub 15pin in

Nein

250W

298 x 190 x 398 mm (11,7"x7,5"x15,7") 22,53 L/dm³

-

5,40 kg / 11,9 lbs.

Vert.: +/-15°

-



H-sync: 15-80 kHz

V-sync: 50-75 Hz

Range max.: 102 MHz

33 fL / max. 289 cm screen width

113 cd/m²

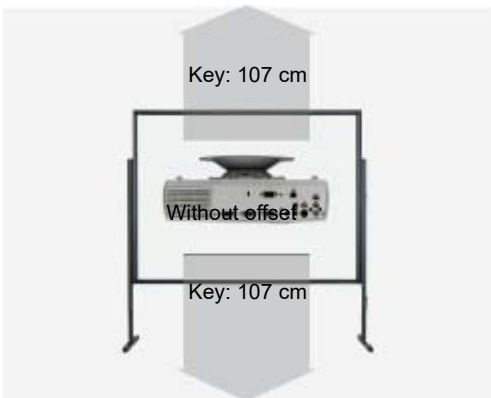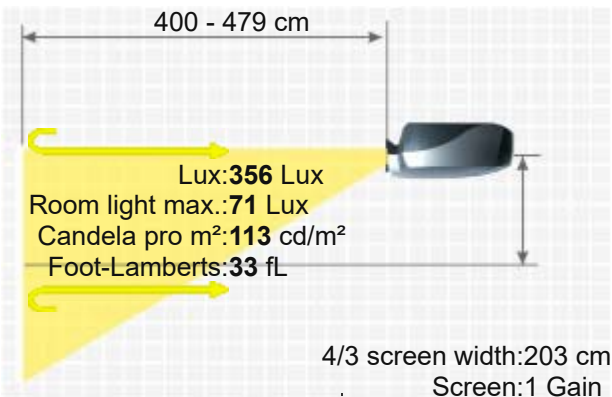

- Freeze
 - Remote control with laser pointer
 - integrated scanner
- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/aviomp15e-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.