

Optoma X312

OPTOMA X312



With the X312, manufacturer Optoma offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 20000:1. The lamp life is specified by the manufacturer as 5000 hours, which converts to over 6.8 years at 2 hours per day. The projector can illuminate a picture width of up to 493 cm thanks to its 3200 Ansi lumens. In room light, however, the picture width should ideally be less than 329 cm. It is also Full HD 1080P and 3D compatible. The model was built by Optoma in 2015 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3200

1067 Lux (bei 200 cm Screen)

Contrast

20000:1 full on/off

20000:1 full on/off

Black Level

0,1600 min. Lumen

0,053 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

190W Lamp

Light Life

Articel Nr.: SP.8VH01GC01 / SP.73701GC01 / BL-FP190D

5000 h.

Operating Costs

7,14% / 0,03 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,55 f=21,8-23,98 mm

Throw Ratio

1,95-2,15:1

Audio

-

Connections

HDMI 1.4a in


D-sub 15pin in

Cinch Video in

S-Video in

Mini Jack Audio in und out

USB Service port in

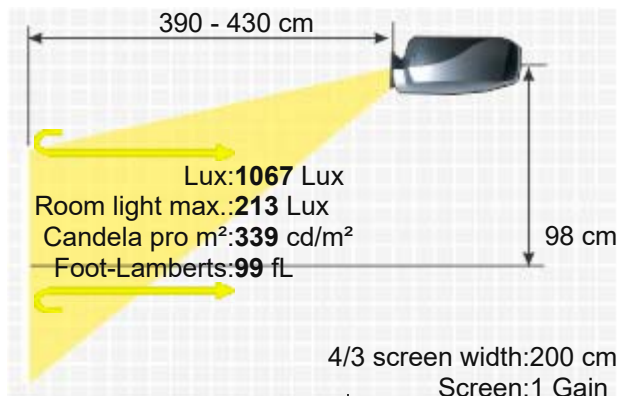

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RS232C Din 9 pin in
Yes
225 / 191W in Eco Mode
315 x 102 x 224 mm (12,4"x4"x8,8") 7,2 L/dm³
29 dB in Eco Mode

Weight
Keystone
Illumination

2,35 kg / 5,18 lbs.
Vert.: +/-40°
-

Frequenz

H-sync: 15,3-91,1 kHz
V-sync: 24-85 Hz

Foot-Lamberts

99 fL / max. 493 cm screen width
339 cd/m²

Features


- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode

Optional

Remote control original SP.8VH02GC01
Lamp original SP.8VH01GC01 / SP.73701GC01 / BL-FP190D

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro23370>
2015 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2015-03-13 14:42:41

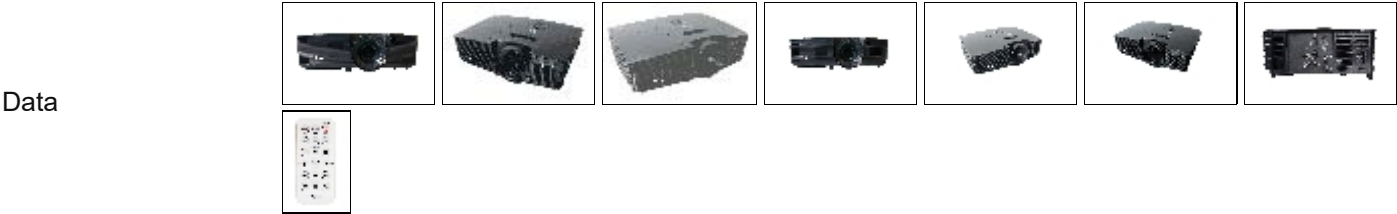

More Details



HCinema

<https://www.projector-database.com/pro/optomax312-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.