

Optoma X515

OPTOMA X515



With the X515, manufacturer Optoma offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 10000:1. With the lens shift function, the projector can be positioned very freely. The projector is equipped with a microphone jack plug and 20W speakers, so no additional speakers are required for presentations or training sessions. The projector can illuminate images up to 702 cm wide thanks to its 6500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 468 cm. It is also Full HD 1080P and 3D compatible. The model was built by Optoma in 2015 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x 0,65" Chip DLP
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

6500

2167 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,6500 min. Lumen

0,217 min. Lumen

Lens shift

Vert.: +55% --45% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

365W Lamp

Articel Nr.: SP.72109GC01 / BL-FU365A

Light Life

2500 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,8

Objective

F=2,3-3,39 f=17,63-31,36 mm

Throw Ratio


1,243-2,238:1

Audio

20W

Connections

2 x HDMI in
3 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out

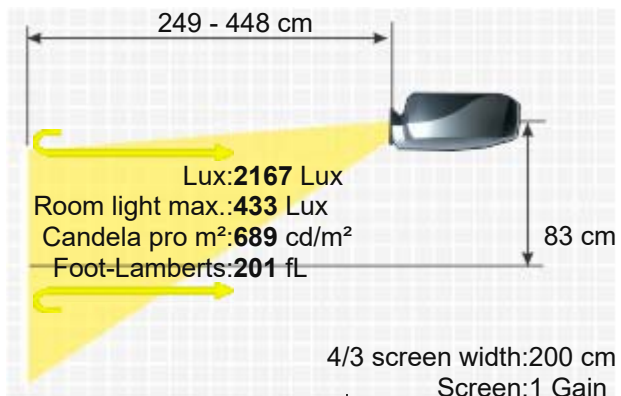

USB Typ A in
RS232C Din 9 pin in
RJ45 in
Mikrofon in
12V Reigger out



Ceiling Mounting Yes
Power 425 / 340W in Eco Mode
Size WxHxD 424 x 160 x 344 mm (16,7"x6,3"x13,5") 23,34 L/dm³
Operating Noise 28 dB in Eco Mode

Weight 5,90 kg / 13,01 lbs.
Keystone Vert.: +/-30°
Illumination Hori.: +/-30°
95%


Frequenz H-sync: 15,3-91,14 kHz
V-sync: 24-85 Hz

Foot-Lamberts 201 fL / max. 702 cm screen width
689 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - Kensington Slot
 - Password protection
 - PJLink™
 - Lan network compatible.
 - Crestron®-Software compatible.

Optional Lamp original SP.72109GC01 / BL-FU365A
Remote control original BR-3070L, SP.72101GC01

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=9001101>
2015 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2016-02-04 11:12:27

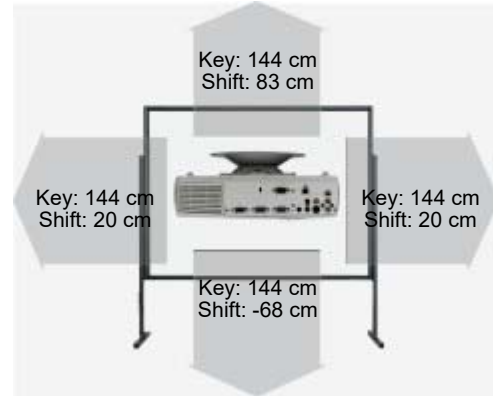

More Details



<https://www.projector-database.com/pro/optomax515-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.