

# Panasonic PT-LB412

PANASONIC PT-LB412



The standard portable PT-LB412 LCD projector from Panasonic has 4100 Ansi lumens, a contrast of 12000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours a day. The integrated media player can play files directly. The horizontal and vertical keystone correction provides leeway when setting up. 4100 Ansi lumens ensure that a picture width of 558 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 372 cm. It is also Full HD 1080P compatible. The model was built by Panasonic in 2015 and is no longer current.

## Brief Introduction

Beta 2.5

## Display Type

3 x 0,63" LCD TFT Panel  
XGA 4/3 Liquid Crystal Display

## Ansi-Lumen

4100

1367 Lux (bei 200 cm Screen)

## Contrast

12000:1 full on/off

12000:1 full on/off

## Black Level

0,3417 min. Lumen

0,114 min. Lumen

## Offset

## Resolution

XGA 1024 x 768  
786.432 Pixel

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

## Application

**Media player formats:** avi jpg bmp png gif tif pdf  
Standard-Portabel | External training and company presentations, as well as product presentations.

## Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

## Light Life

230W UHM Lamp

Articel Nr.: ET-LAL500

## Operating Costs

5000 h. 10000 h. in Eco Mode

9,52% / 0,04 €

## Focus

Manual

## Zoom

Manual 1,2

## Objective

F=1,6-1,76 f=19,16-23,02 mm

## Throw Ratio


1,48-1,78:1

## Audio


10W Mono

## Connections

HDMI in  
D-sub 15pin in und out  
Cinch Video in  
Cinch Stereo in  
S-Video in

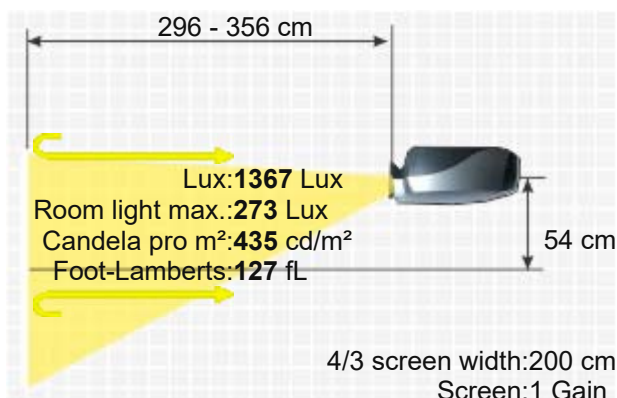


Mini Jack Audio in  
 USB Typ A,B in  
 RS232C Din 9 pin in  
 RJ45 in

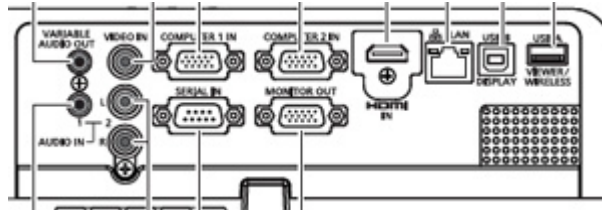

Yes  
 300W / 6W standby  
 335 x 96 x 252 mm (13,2"x3,8"x9,9") 8,1 L/dm³  
 37 / 28 dB in Eco Mode

2,90 kg / 4,41 lbs.  
 Vert.: +/-30° automatisch  
 Hori.: +/-15°  
 80%

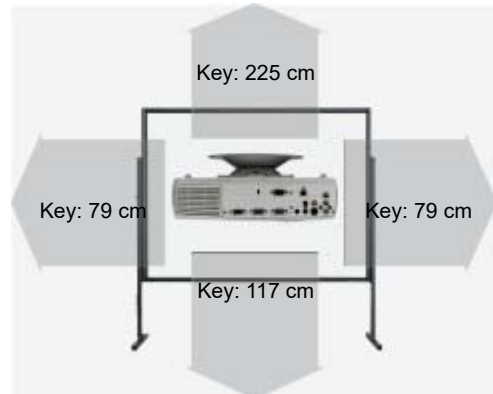

127 fL / max. 558 cm screen width  
 435 cd/m²

- Full HD 1080P compatible
- Integrated Mediaplayer
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.

Remote control original N2QAYA000110 / N2QAYA000116 / N2QAYA000191

Air filter original ET-RFL300

Ceiling bracket original ET-PKL100S

Ceiling bracket original ET-PKL100H

Lamp original ET-LAL500

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9000706>

2015 Discontinued (EOL) // Last update of the data: 2023-08-30

Created: 2015-09-03 11:56:09



# HCinema

<https://www.projector-database.com/pro/panasonicPTLB412-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.