Panasonic PT L730NTE/U

Brief Introduction Beta 2.5	The PT L730NTE/U LCD projector from Panasonic has 2200 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The integrated media player can play files directly. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. 2200 Ansi lumens ensure that a picture width of 408 cm is also possible. However, if room light is available, the picture should be max. 272 cm wide. The model was built by Panasonic in 2002 and is no longer current.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	2200	733 Lux (200 cm Screen width)
Contrast	400:1 full on/off	400:1 full on/off
Black Level Offset	5,5000 min. Lumen	1,846 min. Lumen

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC PAL SECAM Digital-TV-kompatibel **Media player formats:** JPEG-, BMP- oder TIFF PNG
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	220W UHM Lamp Article Nr.: ET-LA730
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,25
Objective	F=1,7-2,2 f=28,7-36 mm
Throw Ratio	1,5-1,9:1
Audio	2W Mono
Connections	S-Video in (Hosiden) Video-Eingang (RCA) Audio-Eingang L+R (RCA) Audio Eingang (3,5mm Klinke) RGB-Anschluss (2 x RGB-Eingang / 1 x RGB-Ausgang) RS232C

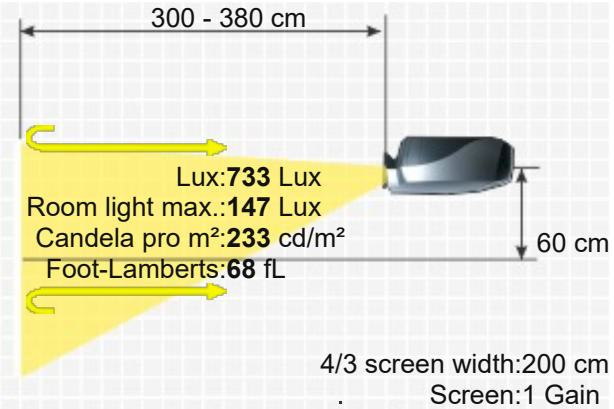

PANASONIC PT L730NTE/U

	PCMCIA USB-Anschluss SD-Karten-Slot
Ceiling Mounting	Yes, is possible.
Power	300W standby 5W
Size WxHxD	245 x 118 x 341 mm (9,6"x4,6"x13,4") 9,86 L/dm³
Operating Noise	39 / 32 dB in Eco Mode
Weight	4,00 kg / 8,82 lbs.
Keystone	Vertical und horizontal
Illumination	-
Frequenz	H-sync: 31-91 kHz V-sync: 50-85 Hz
Foot-Lamberts	68 fL / max. 408 cm screen width 233 cd/m²
Features	■ Integrated Mediaplayer ■ Freeze ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Gamma correction ■ Password protection ■ Remote control with laser pointer und mouse control ■ Wi-Fi network compatible. ■ Lan network compatible. ■ Digita Zoom
Screen Mirroring	-

Optional accessories

	Lampe Ruby	Ruby-LMP2706	87,64 €
	Lampe inkl. Luftfilter Original	ET-LA730	EOL €
	Kompatible Lampe	LMP-K2706	55,24 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	N2QADC000011	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
ET-LEC701	1.32-1.67:1	264-334 m	40% Fix		Manual

Status 2002 Discontinued (EOL) // Last update of the data: 2026-06-09

Data

More Details

HCinema

https://www.projector-database.com/pro/panasonicptl730nte-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.