


Panasonic PT TW231R E/U

PANASONIC PT TW231R E/U



The Panasonic PT TW231R E/U LCD projector has 2500 Ansi lumens, a contrast of 500:1 and a WXGA 1280 x 800 resolution. 2500 Ansi lumens ensure that a picture width of 508 cm is also possible. However, if room light is available, the picture should be max. 339 cm wide. The projector offers an interactive whiteboard function for interactive training courses and presentations. The model is also Full HD 1080P compatible. The model was built by Panasonic in 2012 and is no longer current, but is still very popular in our projector database.



3 x 0,59" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Projector	2500 / 1900 im Eco Mode	Screen	1000 Lux (bei 200 cm Screen)
	500:1 full on/off		500:1 full on/off
	5,0000 min. Lumen		2,01 min. Lumen

Resolution: WXGA 1280 x 800
1.024.000 Pixel
UXGA 1600 x 1200 compressed
Video Modes: PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application: Whiteboard | Training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source: 230W NSHA Lamp
Articel Nr.: ET-LAT100
Light Life: 3000 h. 4000 h. in Eco Mode

Operating Costs: -

Focus: Manual


Zoom: No Zoom

Objective: F=1,8 f=6,68mm

Throw Ratio: 0,50:1

Audio: 10W Mono

Connections:
HDMI in
D-sub 15 pin in und out
S-Video in
Cinch Stereo in
Mini jack Audio in
Cinch Video in
RS232C Din 9 pin in
RJ45 in

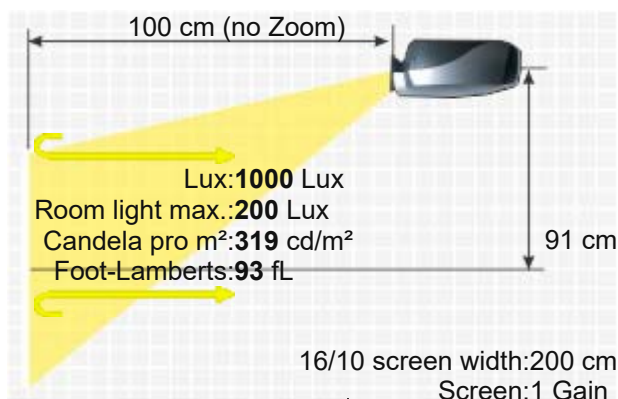

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting	Yes
Power	-
Size WxHxD	350 x 143,4 x 381,90 mm (13,8"x5,6"x15") 19,07 L/dm³
Operating Noise	36 / 29 dB in Eco Mode

Weight	4,70 kg / 10,36 lbs.
Keystone	Vert.: +/-20°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 140 MHz
Foot-Lamberts	93 fL / max. 508 cm screen width 319 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Lan network compatible.
- Short-throw projector
- Whiteboard function.

Features

Optional

Air filter original	ET-RFT100
Interactive Pen original	ET-PEN100
Lamp original	ET-LAT100 / ET-SLMP140
Remote control original	6451053893 / N2AYA000032

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi20970>
 2012 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptw231r-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

