

Panasonic PT-TX350

PANASONIC PT-TX350



With the PT-TX350, manufacturer Panasonic offers a short-throw LCD projector with XGA 1024 x 768 resolution and a contrast of 20000:1. The service life of the lamp is up to 10000 hours, which is equivalent to over 13.7 years at 2 hours per day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. As it is a short-throw projector, the projector can be positioned very close to the wall. For a 2 m wide picture, the projector only needs to be 92 cm away from the screen. Playing 1080P is also no problem for the projector. The model was built by Panasonic in 2020 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3200

Contrast

20000:1

Black Level

0,1600 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

3D Compatibility

Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

230W Lamp

Light Life

Articel Nr.: ET-LAL510

10000 h./ 20000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,8 f=6,08mm

Throw Ratio

0,46:1


Audio

10W Mono

Connections

2 x HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB in

1067 Lux (bei 200 cm Screen)
20000:1
0,053 min. Lumen

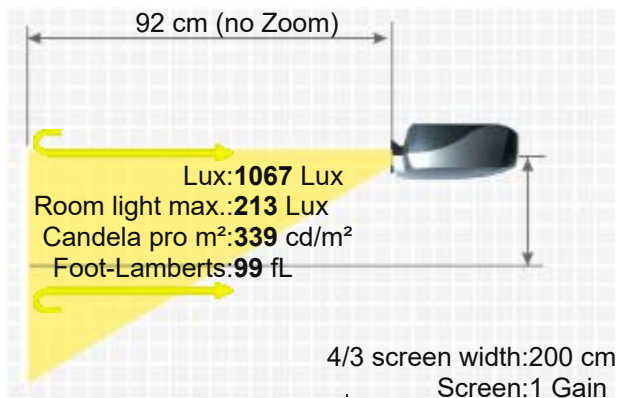

RS232C Din 9 pin in
RJ45 in




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
300W
335 x 134 x 329 mm (13,2"x5,3"x13") 14,77 L/dm³
38 / 35 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz

3,90 kg / 6,61 lbs.
Vert.: +/-15°
Hori.: +/-15°
-

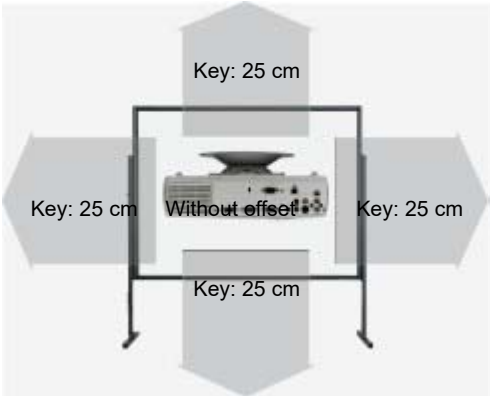

Foot-Lamberts

99 fL / max. 493 cm screen width
339 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector

Optional

- | | |
|------------------------------|------------|
| Air filter original | ET-RFL300 |
| Interactive Pointer original | ET-PNT100 |
| Ceiling bracket original | ET-PKL100S |
| Ceiling bracket original | ET-PKL100H |
| Interactive Pen original | ET-PEN100 |
| Lamp original | ET-LAL510 |

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi9002014>
2020 Discontinued (EOL) // Last update of the data: 2023-08-14
Created: 2020-02-17 19:15:49

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicpttx350-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.