


Barco CineView 12



BARCO CINEVIEW 12



Brief Introduction

Beta 2.5

Display Type



3 x DLP DMD Chip
SXGA 5/4 Ti Digital Light Processing Chip

Ansi-Lumen

12000

3640 Lux (bei 203 cm Screen)

Contrast

450:1 full on/off

450:1 full on/off

Black Level

26,6667 min. Lumen

8.148 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-42,5%

Resolution

SXGA 1280 x 1024

1.310.720 Pixel

UXGA 1600 x 1200 compressed

Video Modes

NTSC, PAL, SECAM, NTSC 4.43, HDTV

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

3000W Xenon Lamp

Light Life

500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

-

Throw Ratio

-

Audio

No

Connections

RS232C
D-sub 15pin in
DVI in
S-Video in
BNC in
HD-SDI in

Ceiling Mounting

Yes

Power

3750W

Size WxHxD

632 x 624 x 1420 mm (24,9"x24,6"x55,9") 560 L/dm³

Operating Noise

-

Weight

143,00 kg / 315,26 lbs.

Keystone

-

Illumination

90%

Frequenz



-

Foot-Lamberts

338 fL / max. 927 cm screen width
1158 cd/m²

Features

■ Lens shift Funktion

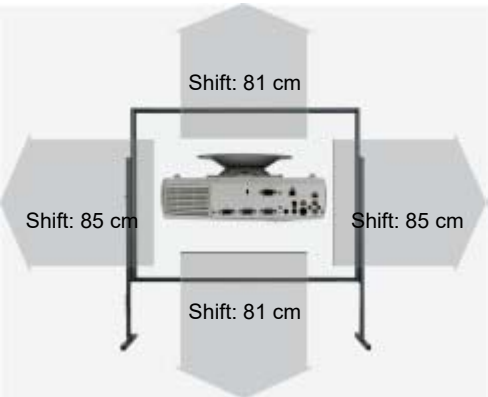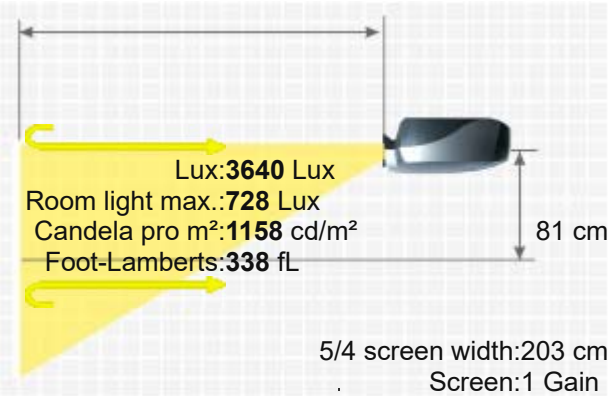

More Details



HCinema

<https://www.projector-database.com/pro/barcocineview12-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.