

# Panasonic PT-TX402

PANASONIC PT-TX402



## Brief Introduction

Beta 2.5

### Display Type

### Ansi-Lumen

### Contrast

### Black Level

### Offset

### Resolution

### Video Modes

### Disc Recognition

### Application

### Light Source

### Light Life

### Operating Costs

### Focus

### Zoom

### Objective

### Throw Ratio

### Audio

### Connections

The Panasonic model PT-TX402 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 12000:1. The manufacturer Panasonic specifies a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours a day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. Thanks to the short-throw projection ratio of just 0.46:1, the projector is also not disruptive in the room. For a 2m wide image, the projector only needs to be 92 cm away from the screen. The model was built by Panasonic in 2015 and is no longer current.



3 x 0,63" LCD TFT Panel  
XGA 4/3 Liquid Crystal Display

Projector

3800  
12000:1 full on/off  
0,3167 min. Lumen

Screen

1267 Lux (bei 200 cm Screen)  
12000:1 full on/off  
0,106 min. Lumen

XGA 1024 x 768  
786.432 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

230W Lamp  
Articel Nr.: ET-LAL500  
5000 h. 10000 in Eco Mode

-

Manual


No Zoom

F=1,8 f=6,08mm

0,46:1

10W Mono

HDMI in  
DVI in  
D-sub 15pin in und out  
Cinch Video in  
Cinch Stereo in  
Mini Jack Audio in und out  
USB in  
RS232C Din 9 pin in  
RJ45 in

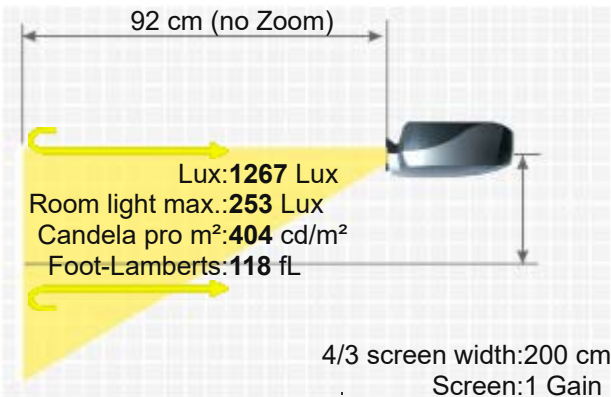

Ceiling Mounting Yes  
Power 300W  
Size WxHxD 335 x 134,10 x 329 mm (13,2"x5,3"x13") 14,77 L/dm³  
Operating Noise 37 / 28 dB in Eco Mode

Weight 3,90 kg / 8,6 lbs.  
Keystone Vert.: +/-15° automatisch  
Hori.: +/-15°

Illumination -  
Frequenz H-sync: 15-91 kHz  
V-sync: 24-85 Hz  
Range max.: 162 MHz  
Foot-Lamberts 118 fL / max. 537 cm screen width  
404 cd/m²

- Features
- Blackboard Modus
  - User logo
  - Eco Mode
  - Automatic and manual vertical keystone correction
  - Kensington Slot
  - Dynamic iris
  - PJLink™
  - Optional Wi-Fi network compatible.
  - Lan network compatible.
  - Short-throw projector

Optional

Remote control original	N2QAYA000110 / N2QAYA000116 / N2QAYA000191
Air filter original	ET-RFL300
Interactive Pointer original	ET-PNT100
Ceiling bracket original	ET-PKL100S
Ceiling bracket original	ET-PKL100H
Interactive Pen original	ET-PEN100
Lamp original	ET-LAL500

Status


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9001016>  
2015 Discontinued (EOL) // Last update of the data: 2023-08-04  
Created: 2015-09-24 13:12:06



More Details



<https://www.projector-database.com/pro/panasonicpttx402-en.html>

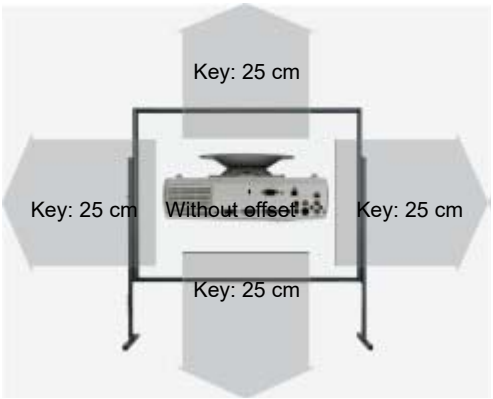

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.