

Runco LS 10i



RUNCO LS 10i



Brief Introduction

Beta 2.5

The LS 10i DLP home cinema has 2100 Ansi lumens, a contrast of 10000:1 and an HDTV 1920 x 1080 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 466 cm is possible as the projector has 2100 Ansi lumens. However, if there is room light, the image should be a maximum of 311 cm wide. It is also Full HD 1080P compatible. The model was built by Runco in 2010 and is no longer current, but is still very popular in our projector database.

Display Type



3 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2100

933 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,2100 min. Lumen

0,093 min. Lumen

Lens shift

Vert.: +/-65% Hori.: +/-30%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D-Blu-ray | 4K UHD-Blu-ray

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

260 / 230W im Eco Mode Lamp

Light Life

Article Nr.: 997-5353-00

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

2 x HDMI in
D-sub 15 pin in
2 x YUV in
S-Video in
Cinch Video in
RS232C
12V Trigger out

Ceiling Mounting

Yes, is possible.

Power


400W

Size WxHxD

519 x 225 x 643 mm (20,4"x8,9"x25,3") 75,09 L/dm³

Operating Noise

-

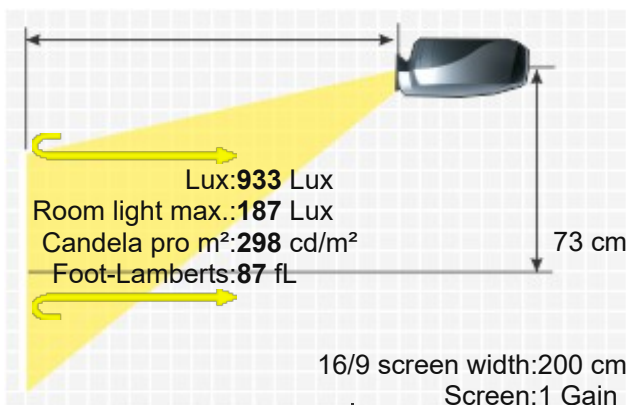

Weight

18,50 kg / 40,79 lbs.

Keystone

-

Illumination

-

Frequenz -

Foot-Lamberts 87 fL / max. 466 cm screen width

298 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - Gamma correction
 - Dynamic iris
 - Picture-in-Picture
 - Overscan adjustable

Screen Mirroring Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads



Optional accessories

	Nackte Osram Lampe	NLMP18352	113,74 €
	Lampe Ruby	Ruby-LMP18352	201,94 €
	Lampe Original	997-5353-00	EOL €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
4.34 - 6.76:1	4.34-6.76:1	8.7-13.5 m	+/-65%	+/-30%	Powered
2.90 - 4.34:1	2.9-4.34:1	5.8-8.7 m	+/-65%	+/-30%	Powered
2.17 - 2.90:1	2.17-2.9:1	4.3-5.8 m	+/-65%	+/-30%	Powered
1.74 - 2.17:1	1.74-2.17:1	3.5-4.3 m	+/-65%	+/-30%	Powered
1.45 - 1.74:1	1.45-1.74:1	2.9-3.5 m	+/-65%	+/-30%	Powered

Fix Optional Lenses

0.77:1	0.77:1	1.5 m	0.0% Fix	No Zoom
--------	--------	-------	----------	---------

Status Data 2010 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/runcols10i-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.