

Runco VX 5c

RUNCO VX 5C



Brief Introduction

Beta 2.5

The Runco model VX 5c is a DLP projector with SXGA 1280 x 1024 resolution and a contrast of 400:1. The brightness of 3000 Ansi lumens enables a picture width of 464 cm. In room light, the picture should be max. 309 cm wide. Furthermore, the projector can play 1080P without any problems. The model was built by Runco in 2001 and is no longer current. Unfortunately, we can no longer offer a replacement lamp for this model, neither original nor replica.



3 x 0,9" DLP Chip
SXGA 5/4 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

3000
400:1 full on/off
7,5000 min. Lumen
910 Lux (bei 203 cm Screen)
400:1 full on/off
2.294 min. Lumen

Resolution
SXGA 1280 x 1024
1.310.720 Pixel

Video Modes
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source
700W Xenon Lamp
Articel Nr.: RUPA 003900 / 150-0131-00

Light Life
1500 h.

Operating Costs
-

Focus
Powered

Zoom
Powered

Objective
optional

Throw Ratio
optional

Audio
-

Connections
Am VHD Controller:
(1) Component, (1) S-video, (1) Composite, (1) DTV / Computer

Ceiling Mounting
Yes

Power
-

Size WxHxD
734 x 330 x 802,6 mm (28,9"x13"x31,6") 194,26 L/dm³

Operating Noise
-


Weight
79,38 kg / 175 lbs.

Keystone
-

Illumination
-

Frequenz
H-sync: 15-120 kHz
V-sync: 24-120 Hz
Range max.: 120 MHz

Foot-Lamberts
85 fL / max. 464 cm screen width
291 cd/m²

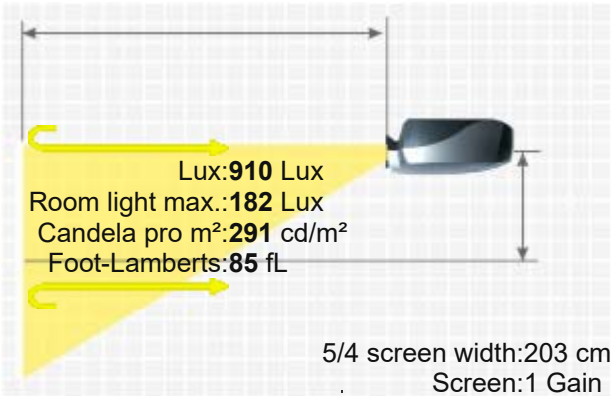

- Full HD 1080P compatible
- Freeze
- Gamma correction
- Digital image shift
- Password protection
- Overscan adjustable
- External video processor included.
- Lamp adjustable from 450 to 700 W

Features

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Runco Zoom Option #3	4-7:1	8.1-14.2 m			Powered
Runco Zoom Option #2	2.2-4:1	4.5-8.1 m			Powered
Runco Zoom Option #1	1.5-2.2:1	3-4.5 m			Powered
Fix Optional Lenses					
Runco Fixed Lens	0.8:1	1.6 m			No Zoom

Status
Data

2001 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/runcovx5c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.