

Sanyo PLC WTC500/L

SANYO PLC WTC500/L



The PLC WTC500/L LCD projector from Sanyo has 5000 Ansi lumens, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. The projector also offers a lens shift function that makes image adjustment child's play. The projector can illuminate an image width of up to 718 cm thanks to its 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm. The model is also Full HD 1080P compatible. The model was built by Sanyo in 2009 and is no longer current.



3 x 0,95" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector

5000
3000:1 full on/off
1,6667 min. Lumen

Screen

2000 Lux (bei 200 cm Screen)
3000:1 full on/off
0,667 min. Lumen

Vert.: +50% -0% Hori.: +/-15%
WXGA 1280 x 800

1.024.000 Pixel
UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

330W NSHA Lamp

Articel Nr.: 610-342-2626 / LMP125

2500 h. 3000 h. in Eco Mode

-

Powered


Powered 1,3

F=1,7-2,1 f=33-43 mm / L optional

1,62-2,11:1

2 x 3W

DVI-D in
D-sub 15 pin in
5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C Din 9 pin in
USB in

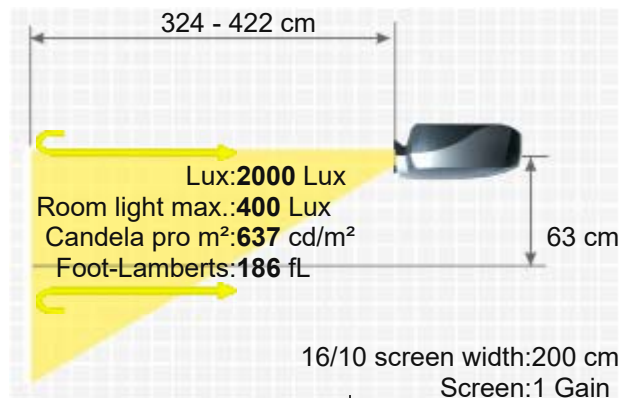

Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Yes

Power

440 / 420W in Eco Mode

Size WxHxD

451 x 175 x 550,1 mm (17,8"x6,9"x21,7") 43,41 L/dm³

Operating Noise

31 dB in Eco Mode

Weight

14,70 kg / 32,41 lbs.

Keystone

Vert.: +/-40°

Hori.: +/-20°

Illumination

90%

Frequenz

H-sync: 15-100 kHz

V-sync: 50-100 Hz

Range max.: 140 MHz

Foot-Lamberts

186 fL / max. 718 cm screen width

637 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable
- Picture-in-Picture
- Remote control with laser pointer
- Digital zoom
- Automatic lamp replacement function

Bulb only

NLMP19207

Lamp ruby

Ruby-LMP19207

Lamp original

610-342-2626 / LMP125 / ET-SLMP125

Compatible lamp

LMP-K18872

Universal Remote original

Fernb-uni-V3

Air filter compatible

Alternative zu:POA-FIL-100 / 610 342 9571 / ET-SFYL100 / 003-003965-01

Air filter original

POA-FIL-100 / 610 342 9571 / ET-SFYL100 / 003-003965-01

Order here:

<https://www.hcinema.de/lampen/shop-en.php?id=n19207>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W10	1.24-1.63:1	2.5-3.3 m	50%	+/-15%	Powered
LNS-T11	3.43-5.43:1	6.9-10.9 m	50%	+/-15%	Powered
LNS-T10	2.13-3.46:1	4.3-6.9 m	50%		Powered
Fix Optional Lenses					
LNS-W11	0.82:1	1.6 m	0.0% Fix		No Zoom
Status	2009 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data



More Details



HCinema

<https://www.projector-database.com/pro/sanyoplctwc500l-en.html>

