

Sanyo PLC XT11

SANYO PLC XT11



Brief Introduction

Beta 2.5

The Sanyo PLC XT11 LCD projector has 2750 Ansi lumens, a contrast of 700:1 and an XGA 1024 x 768 resolution. The projector also offers an integrated media player that can be used to play files directly. The projector also offers a lens shift function that makes image adjustment childs play. The projector can illuminate an image width of up to 457 cm thanks to its 2750 Ansi lumens. In room lighting, however, the picture width should ideally be less than 305 cm. The model was built by Sanyo in 2003 and is no longer current.

Display Type

3 x 1,0" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2750

890 Lux (bei 203 cm Screen)

Contrast

700:1 full on/off

700:1 full on/off

Black Level

3,9286 min. Lumen

1.277 min. Lumen

Lens shift

Vert.: +50% -0%

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, NTSC4.43, PAL-M/N HDTV 1080i, 720p 480p 1035i

Media player formats: BMP JPEG

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

250W UHP Lamp

Articel Nr.: 610 305 5602

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,3

Objective

F=1,7-2,1 f=33-43 mm

Throw Ratio

1,6-2,1:1

Audio

2 x 2W

Connections

DVI-I

D-Sub15 pin in und out

YUV in

Cinch Video in

2 x Mini Jack in

RS232C Mini- DIN8 pin

USB Type B

Ceiling Mounting

Yes

Power

350W

Size WxHxD

302 x 162 x 422 mm (11,9"x6,4"x16,6") 20,65 L/dm³

Operating Noise

31dB


Weight

7,80 kg / 17,2 lbs.

Keystone

Vert.: +/-40°

Hori.: +/-10°

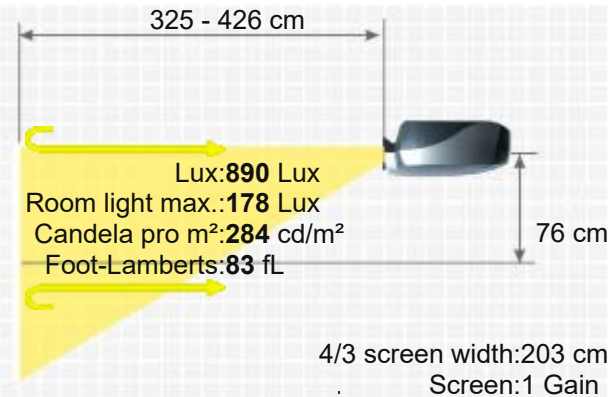

Illumination

90%

Frequenz

H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 180 MHz

Foot-Lamberts

83 fL / max. 457 cm screen width
284 cd/m²

- Lens shift Funktion
- Integrated Mediaplayer
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with laser pointer und mouse control
- De-interlacer with 3-2 pull-down
- Digital zoom 49x
- SD memory card slot optional
- Wireless LAN optional
-

Optional	Osram bulb only	NLMP3436
	Lamp ruby	Ruby-LMP3436
	Lamp original	610-305-5602 / LMP59 / ET-SLMP59
	Compatible lamp	LMP-K1374
	Universal Remote original	Fernb-uni-V3
	Remote control original	945 064 8787 / CXLZ CXRD
	Air filter original	610 307 6331
Order here: https://www.hcinema.de/lampen/shop-en.php?id=n3437		

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Sanyo LNS-W10	1.24-1.61:1	2.5-3.3 m	50%		Powered
Sanyo LNS-T10	2.12-3.46:1	4.3-7 m	50%		Powered

Status2003 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/sanyoplctx11-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

