



Barco SLM G10 Performer



BARCO SLM G10 PERFORMER



Brief Introduction

Beta 2.5

The SLM G10 Performer DLP has 10000 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. Includes a lens shift function, which provides freedom during installation. An image width of up to 871 cm is possible, if the image width is smaller (we recommend max. 581 cm), rooms with residual light are also no problem. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. The projector was launched in 2004 and is no longer sold by the manufacturer. It should also be noted that, unfortunately, there are no longer any replacement lamps for the projector, neither originals nor replicas.



3 x DLP DMD Chip

XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

10000

3236 Lux (bei 203 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

20,0000 min. Lumen

6.512 min. Lumen

Lens shift

Vert.: +59% -13,5% Hori.: +/-32,5% motorisch max.

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

NTSC, PAL, SECAM, NTSC 4.43, EDTV 480p, 576p HDTV 1080i, 720p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2200W Xenon Lamp

Articel Nr.: R9841810

Light Life

500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections

S-Video

5 x BNC RGBHV

RS232C

2 x DVI in und out

Ceiling Mounting

Yes

Power

2750W

Size WxHxD

585 x 426 x 876 mm (23"x16,8"x34,5") 218,31 L/dm³

Operating Noise

58dB

Weight

57,00 kg / 125,66 lbs.

Keystone

-

Illumination



90%

Frequenz


-

Foot-Lamberts

301 fL / max. 871 cm screen width

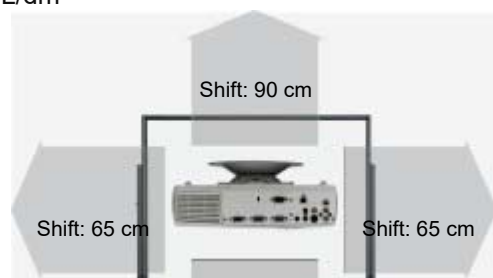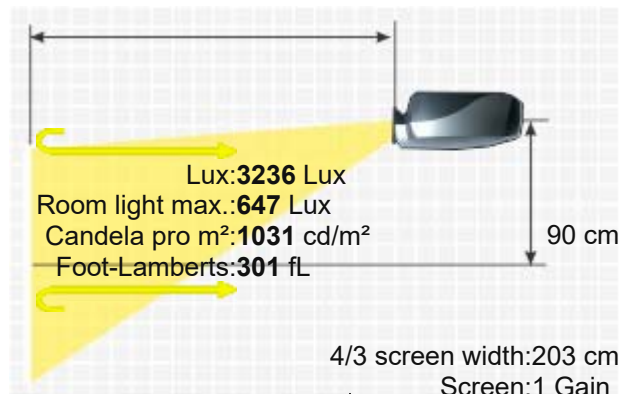

1031 cd/m²



- Lens shift Funktion motorisch max.
- Freeze
- Kensington Slot
- Gamma correction
- Edge Blending
- Picture-in-Picture
- Password protection
- optional
- Digital Zoom
- RJ45 optional
- SDI and HD-SDI optional

Features

Optional

Lamp original	R9841810
Refurbished lamp original	R9841820
SLM dust filters (24-pack) original	R84540924K

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=542>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
TLD5.0-8.0:1	4.97-8.28:1	10.1-16.8 m	59-13.5%	+/-32.5%	Powered
TLD2.8-5.0:1	2.84-5.18:1	5.8-10.5 m	59-13.5%	+/-32.5%	Powered
TLD2.0-2.8	2.03-2.88:1	4.1-5.8 m	50-13.5%	+/-32.5%	Powered
TLD1.6-2.0:1	1.62-2.03:1	3.3-4.1 m	59-13.5%	+/-32.5%	Powered
Fix Optional Lenses					
TLD1.2:1	1.22:1	2.5 m	21.5-12.5%	+/-23%	No Zoom
TLD0.8:1	0.85:1	1.7 m	21.5-12.5%	+/-23%	No Zoom

Status Data 2004 Discontinued (EOL) // Last update of the data: 2023-10-26

More Details



HCinema

<https://www.projector-database.com/pro/barcoslm10performer-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.