

Sony SRX T420

SONY SRX T420



Brief Introduction

Beta 2.5

A brief introduction to the SRX T420: The Sony E-Cinema SXR projector offers 21000 Ansi lumens, a contrast of 3000:1 and a UHD (4K+2K) 4096 x 2160 resolution. The manufacturer specifies a lamp life of 600 hours, which is over 0.8 years if enjoyed for two hours a day. 21000 Ansi lumens ensure that a picture width of 813 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 542 cm. It is also Full HD 1080P and 4K compatible. The model was built by Sony in 2009 and is no longer current, but is still a popular projector in our database. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither original nor replica.

Display Type

3 x 1,55" SXR Panel
UHD 19/10 Silicon X-tal Reflective Display (SXR)

Ansi-Lumen

21000

9956 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

7,0000 min. Lumen

3,321 min. Lumen

Offset

-

Resolution

UHD (4K+2K) 4096 x 2160
8.847.360 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

Application

E-Cinema | Digital Cinema (D-Cinema) in the movie theater.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

4,2 KW Lamp

Light Life

Articel Nr.: LKRX-2042A

600 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections

DVI mit HDCP in

RS232C

RJ45 in

Weitere Anschlüsse optional.

Ceiling Mounting

Yes

Power


-

Size WxHxD

700 x 640 x 1250 mm (27,6"x25,2"x49,2") 560 L/dm³

Operating Noise

-

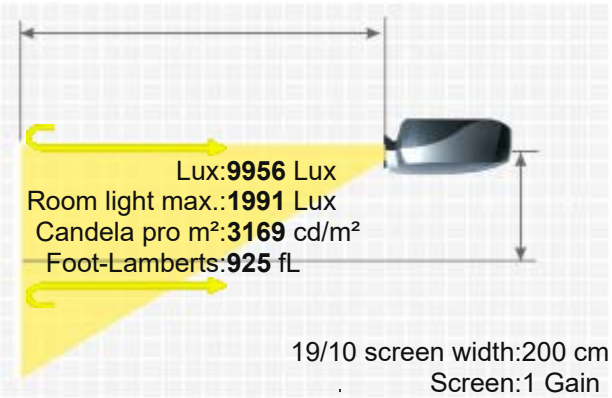

Weight181,00 kg / 399,04 lbs.
Keystone-
Illumination-
Frequenz-
Foot-Lamberts925 fL / max. 813 cm screen width
3169 cd/m²
Features

- Full HD 1080P compatible
- Gamma correction
- Lan network compatible.

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LKRL-Z140	3.81-7.12:1	7.6-14.2 m			Powered
LKRL-Z122	2.23-4.03:1	4.5-8.1 m			Powered
LKRL-Z119	1.81-2.94:1	3.6-5.9 m			Powered
LKRL-Z117	1.72-2.39:1	3.4-4.8 m			Powered
LKRL-Z115	1.48-1.81:1	3-3.6 m			Powered
LKRL-Z114C	1.35-1.95:1	2.7-3.9 m			Powered
LKRL-Z111C	1.07-1.71:1	2.1-3.4 m			Powered
KRL-Z116C	1.5-2.29:1	3-4.6 m			Powered
Fix Optional Lenses					
LKRL-90	0.9:1	1.8 m			No Zoom

Status2009 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/sonysrxt420-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.