

Sony VPL CX70

SONY VPL CX70



The standard portable VPL CX70 LCD has 2000 Ansi lumens, a contrast of 350:1 and an XGA 1024 x 768 resolution. The horizontal and vertical keystone correction provides leeway when setting up. An image width of up to 389 cm is possible as the projector has 2000 Ansi lumens. However, if room light is available, the picture should be max. 259 cm wide. The model was built by Sony in 2004 and is no longer current.

3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

2000 / 1600 im Eco Mode
350:1 full on/off
5,7143 min. Lumen
647 Lux (bei 203 cm Screen)
350:1 full on/off
1.865 min. Lumen

XGA 1024 x 768
786.432 Pixel

SXGA 1280x1024 compressed

NTSC/PAL/SECAM/NTSC4.43/PAL - M/PAL-N

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

165W UHP Lamp

Articel Nr.: LMP-C161

2000 h. 3000 h. in Eco Mode

-

Automatic

Powered 1,2

F=1,6-1,78 f=23,5-28,2 mm

1,46-1,76:1

1 x 1W Mono

D-sub 15pin in


S-Video in

Cinch Video in

USB Typ B in



Ja

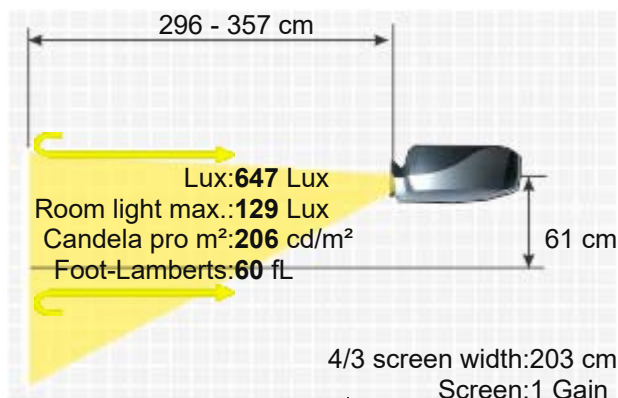

Power 240W / standby 4W
Size WxHxD 298 x 69 x 243,5 mm (11,7"x2,7"x9,6") 5 L/dm³
Operating Noise 37 / 30 dB in Eco Mode

Weight 2,90 kg / 6,39 lbs.
Keystone Vert.: +/-20°
Hori.: +/-20°

Illumination -


Frequenz H-sync: 19-92 kHz
V-sync: 48-92 Hz

Foot-Lamberts 60 fL / max. 389 cm screen width
206 cd/m²

- Features
- Freeze
 - Eco Mode
 - Kensington Slot
 - Password protection
 - Remote control with laser pointer
 - Digital Zoom
 - motoric lens shutter

Lamp ruby Ruby-LMP3881
Lamp original LMP-C161
Optional Compatible lamp LMP-K20327
Remote control original 147655622 / RM-PJM17

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d3881>
2004 Discontinued (EOL) // Last update of the data: 2023-10-26

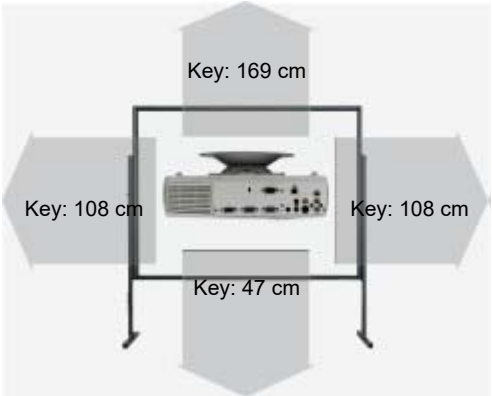

More Details



HCinema

<https://www.projector-database.com/pro/sonyvplcx70-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.