

Specktron WDL-4500i

SPECKTRON WDL-4500i



The Specktron model WDL-4500i is a DLP laser projector with WXGA 1280 x 800 resolution and a contrast of 10000:1. The service life is 20000 hours due to the laser, which is over 13.7 years with a daily viewing time of 4 hours. The horizontal and vertical keystone correction allows the projector to be positioned very freely. With a projection ratio of just 0.27:1, this projector never gets in the way. For a 2m wide image, the projector needs to be just 54 cm away from the screen. The model offers a microphone jack plug and 10W speakers, so no additional audio devices are required for presentations or training sessions. Furthermore, the projector can play 1080P without any problems. The model was built by Specktron in 2020 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections



DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Projector

4500

10000:1

0,4500 min. Lumen

Screen

1800 Lux (bei 200 cm Screen)

10000:1

0,18 min. Lumen

WXGA 1280 x 800
1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Short Distance | Wide screen width or rooms with plenty of light (over 200 lumens).

Laser

20000 h.

0,00 € Laser

Manual

No Zoom

F=2,4

0,27:1

1 x 10W

2 x HDMI in

D-sub 15pin in und out

Cinch Video in

Cinch Stereo in

Microphone

Mini Jack Audio in und out

USB in

RS232C Din 9 pin in

RJ45 in



Ceiling Mounting Yes
Power 360W / 180W in Eco Mode
Size WxHxD 383 x 86 x 310 mm (15,1"x3,4"x12,2") 10,21 L/dm³
Operating Noise -

Weight 5,50 kg / 12,13 lbs.
Keystone Vert.: +/-5°
Hori.: +/-5°

Illumination -


Frequenz -

Foot-Lamberts 167 fL / max. 682 cm screen width
572 cd/m²

- Features
- Full HD 1080P compatible
 - Eco Mode
 - Kensington Slot
 - Lan network compatible.
 - Short-throw projector

Optional Remote control original BR-3080N

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002160>
2020 Discontinued (EOL) // Last update of the data: 2023-08-04
Data Created: 2020-03-01 13:28:27

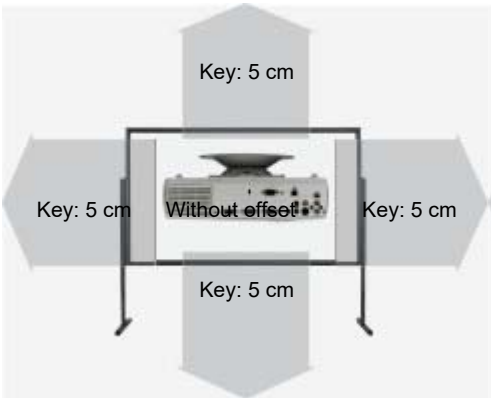

More Details

HCinema

<https://www.projector-database.com/pro/specktronwdl4500i-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.