

TAXAN V 339



TAXAN V 339



Brief Introduction

Beta 2.5

The Micro-Portabel V 339 DLP has 1300 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 314 cm is possible as the projector has 1300 Ansi lumens. However, if room light is available, the picture should be max. 209 cm wide. The model was built by TAXAN in 2005 and is no longer current, but is still very popular in our projector database. It should also be noted that there are unfortunately no more replacement lamps available for this projector, neither originals nor replicas.

1 x 0,7" DDR DDP2000 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1300 / 1040 im Eco Mode

433 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

0,6500 min. Lumen

0,217 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Micro-Portabel | Small mobile presentations..

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

130W Lamp

Articel Nr.: 28-059

Light Life

1500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,6-2,9 f=27,5-33 mm

Throw Ratio

1,9-2,3:1

Audio

1 x 0,5W Mono

Connections

D-sub 15pin in
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack
USB

Ceiling Mounting

-

Power

190 / 170W in Eco Mode

Size WxHxD

186 x 46 x 176 mm (7,3"x1,8"x6,9") 1,51 L/dm³

Operating Noise

-

Weight

1,30 kg / 2,87 lbs.

Keystone

Vert. +12°-18° automatisch


Illumination


80%

Frequenz

H-sync: 15-80 kHz

V-sync: 50-85 Hz

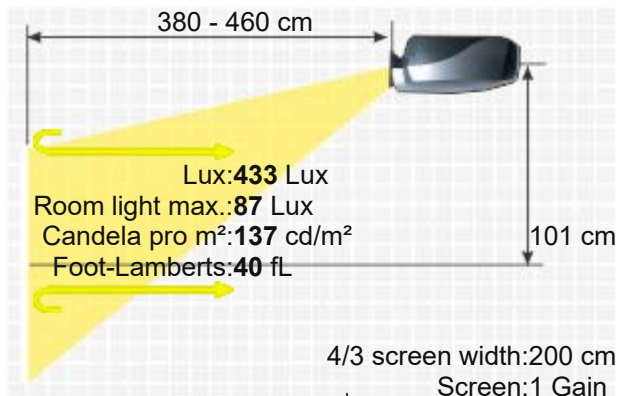

Foot-Lamberts	40 fL / max. 314 cm screen width	
	137 cd/m²	
Features	■ Freeze ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ Remote control with laser pointer ■	
Status Data	2005 Discontinued (EOL) // Last update of the data: 2023-08-04	

More Details



HCinema

<https://www.projector-database.com/pro/taxanv339-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.