

Toshiba TLP XC3000/A

TOSHIBA TLP XC3000/A



Brief Introduction

Beta 2.5

The standard portable Toshiba TLP XC3000/A LCD projector has 3000 Ansi lumens, a contrast of 600:1 and an XGA 1024 x 768 resolution. An image width of up to 477 cm is possible. However, the image should be smaller in room light. We recommend max. 318 cm. The model was built by Toshiba in 2006 and is no longer current.

Display Type



3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

600:1 full on/off

600:1 full on/off

Black Level

5,0000 min. Lumen

1,675 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

220W / 160W im Eco Mode Lamp

Light Life

Articel Nr.: TLP-LW12 TLPLW12LAMP

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,8-2,1 f=26,5-31,5 mm

Throw Ratio

1,86-2,21:1

Audio

1W Mono

Connections


D-sub 15pin in und out

S-Video in

Cinch Video in


Cinch Stereo in

RS232C Din 8pin



Ceiling Mounting

Yes

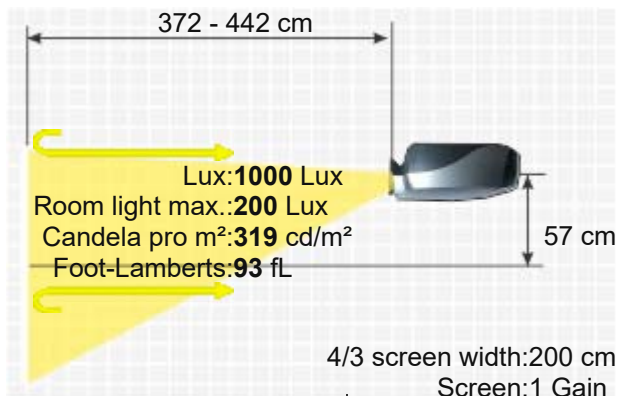

Power 320W
Size WxHxD 370 x 92 x 249 mm (14,6"x3,6"x9,8") 8,48 L/dm³
Operating Noise 34 / 29 dB in Eco Mode

Weight 4,00 kg / 8,82 lbs.
Keystone Vert.: +/-30° automatisch
Illumination -

Frequenz H-sync: 16-106 kHz
V-sync: 50-85 Hz

Foot-Lamberts 93 fL / max. 477 cm screen width
319 cd/m²

- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Digital image shift
- Password protection
- Remote control with laser pointer und mouse control
- .
- Document camera:
- Lens F = 2.8, f = 2.8 mm
- Focus Two-step switch
- Zoom None (adjusted by distance to subject)
- Pixel type 1/4.2 honeycomb CCD
- Effective pixels 629,856 pixels (648H × 486V × 2)

Optional	Bulb only	NLMP16136
	Lamp ruby	Ruby-LMP16136
	Lamp original	TLPLW12
	Compatible lamp	LMP-K16136
	Universal Remote original	Fernb-uni-V3
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16137>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/toshibatlpxc3000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

