

MS560P SVGA Business Projector for Meeting Rooms

4000 ANSI Lumens, Contrast Ratio: 22,000:1
Exclusive Data Review Mode, Anti Dust-Sensor



Dual
HDMI™



DATA
REVIEW
MODE




Category	Spec Attribute	MS560P
Display	Projection System	DLP Single
	DMD type	0.55" SVGA
	Native Resolution	800 x 600 pixels
	Brightness	4000 ANSI Lumens
	Contrast Ratio*	22,000 : 1
	Display Color	30 Bits/ 1.07 Billion Colors
	Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
	Light Source	Lamp
	Light Source life*	Normal 6000 hr, Economic 10000 hr, SmartEco 10000 hr, LampSave 15000hr
Optical	Zoom Ratio	1.1x
	Keystone Correction	Auto 1D, Vertical +/- 40 degrees
	Projection Offset	110.0%
	Projection Size	30"~300"
	Throw Ratio	1.96~2.15
Audio	Built-in Speaker	10Wx1
Special Feature	Security	Security Bar, Kensington lock
	Feature	1D Auto Keystone, High Brightness, Spreadsheet mode, Bright Mode, Presentation Mode, Infographic Mode, Video Mode, Srgb Mode
Compatibility	Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)
	Horizontal Frequency	15K~102KHz
	Vertical Scan Rate	23 ~ 120 Hz
	HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
Connectivity	I/O Port	HDMI-1 x1
		HDMI-2 x1
		USB TypeA x1 (1.5A power)
		USB Type min B x1 (For FW upgrade)
		Computer In (D-sub 15pin, Female) x1
		Monitor out (D-sub 15pin,Female) x1
		RS232 In (D-sub 9pin, male) x1
		Audio in (mini jack) x1
		Audio out (mini jack) x1
		Kensington anti-theft lock slot x1
		AC Inlet x1
Power	Power Consumption (Max/Normal/Eco)	Max 280W, Normal 260W, Eco 215W
	Standby Power Consumption	Normal < 0.5Watts.
	Power Supply	100 ~ 240V AC
Dimension and Weight	Product Dimensions (WxHxD)	296 x 120 x 221 mm
	Product Weight	2.3kg +/- 200g
Operation Condition	Noise Level(Normal/Eco)	34 /29 dBA
	Operating Temperature	0°~40°C
Accessories	Accessories (Standard)	QSG(4J.JND01.001)
		Remote Control (5J.JND06.001)
		AAA Batteryx2
		VGA cable (1.5m)
		Power Cord (1.8m)
		Warranty card (by Region)
	Accessories (Optional)	Spare Lamp Kit (5J.JND05.001)
		3D Glasses (5J.J9H25.002)
		Ceiling mount
		Qcast Mirror(5A.JH328.10X)
		WDC10
		WDC20
OSD	On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese/ Farsi / Vietnamese/ (30 Languages)

* The Contrast is measure by Full On Full Off standard.

** LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Connectivity

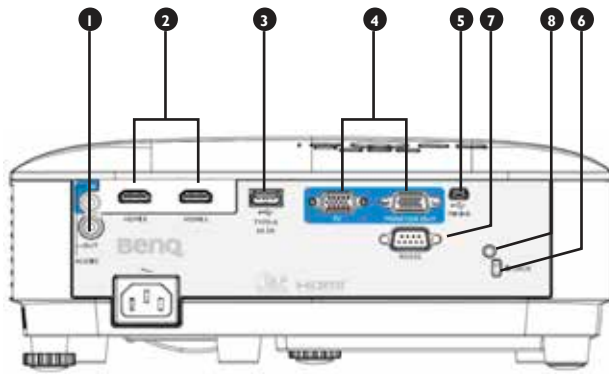


- 1 Audio IN/OUT
- 2 HDMI 1/2
- 3 USB TypeA
- 4 PC & Monitor OUT
- 5 USB MINI-B
- 6 Lock
- 7 RS232
- 8 AC Inlet

Qty

1
1
1
1
1
1
1
1

Ceiling / Wall Mount Chart


Ceiling/Wall mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

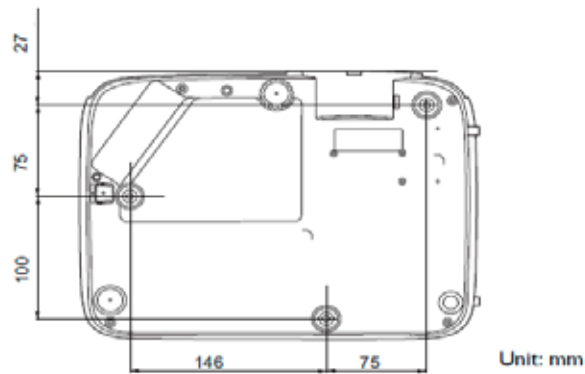

Dimensions

Dimensions

296 mm (W) x 120 mm (H) x 221 mm (D)

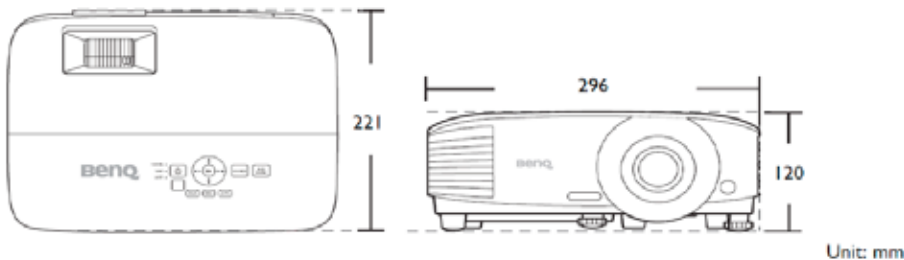

Corporate Office: BenQ India Pvt. Ltd.

9B Building, IIIrd Floor, DLF Cyber City, DLF Phase III, Gurgaon Haryana, India - 122002,

Tel: +91 124-4501400, Fax: +91 124-4501400

www.BenQ.in, Customer Care No. 1800-419-9979, E-mail: Sales.EnquiryIn@BenQ.com

Regional Distributor M.P. State :

Pacific Marketing (Ind.)

293 A & B, 2nd Floor , Orbit Mall ,

AB road, Indore . 452010 (M.P.)

Tel .0731-4288065 ,4041540 M : 9826037540



2 Years Onsite Warranty for Projector.

Lamp Warranty of 1 year or 1000 Hrs whichever is earlier

www.BenQ.in | Like BenQ India on    

