

Viewsonic PJ503D

VIEWSONIC PJ503D



The standard portable PJ503D DLP projector from Viewsonic has 1500 Ansi lumens, a contrast of 2000:1 and an SVGA 800 x 600 resolution. An image width of up to 337 cm is possible. However, the image should be smaller in room light. We recommend max. 225 cm. At just 30 decibels, the device is one of the quieter projectors. The model was built by Viewsonic in 2007 and is no longer current, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DDR DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1500

Screen 500 Lux (bei 200 cm Screen)

Contrast

Projector 2000:1 full on/off

Screen 2000:1 full on/off

Black Level

Projector 0,7500 min. Lumen

Screen 0,25 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

160W Lamp

Article Nr.: RLC-030

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,57 f=22,2mm

Throw Ratio

1,969:1

Audio

Nein

Connections


D-sub 15pin in

S-Video in

Cinch Video in

USB Typ B

RS232C Din 9pin in

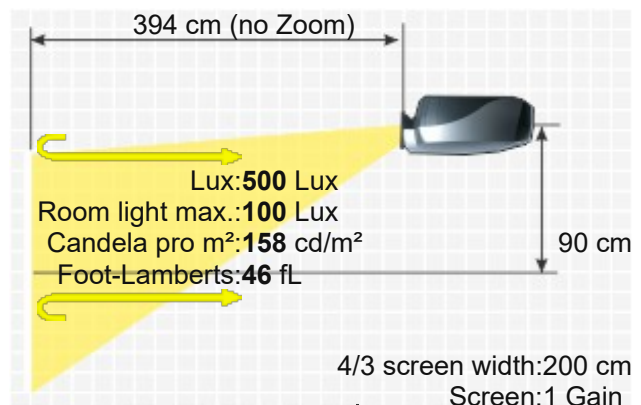



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
250W
263 x 108 x 218 mm (10,4"x4,3"x8,6") 6,19 L/dm³
30 / 27 dB in Eco Mode

Weight
Keystone
Illumination

2,60 kg / 5,73 lbs.
Vert.: +/-7°
-

Frequenz

H-sync: 30-100 kHz
V-sync: 50-87 Hz

Foot-Lamberts


46 fL / max. 337 cm screen width
158 cd/m²

Features

- Freeze
- Eco Mode
- sRGB
- Digital Zoom
- 5-segment colour wheel.

Screen Mirroring

-

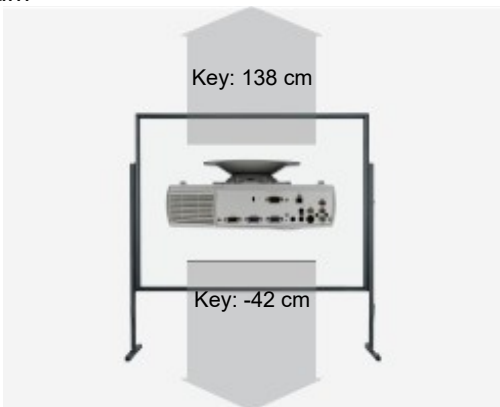

Optional accessories

	Nackte Lampe	NLMP16511	78,23 €
	Lampe Ruby	Ruby-LMP16511	110,25 €
	Lampe Original	RLC-030	EOL €
	Kompatible Lampe	LMP-K16511	73,34 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2007 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/viewsonicpj503d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.