

# Viewsonic PJD5232L

VIEWSONIC PJD5232L



The Viewsonic PJD5232L 3D BrilliantColor DLP projector has 2800 Ansi lumens, a contrast of 15000:1 and an XGA 1024 x 768 resolution. The manufacturer Viewsonic specifies a lamp life of 4500 hours, which is over 6.2 years if enjoyed for two hours a day. An image width of up to 461 cm is possible as the projector has 2800 Ansi lumens. However, if room light is available, the picture should be max. 307 cm wide. Playing 1080P and 3D is also no problem for the projector. The model was built by Viewsonic in 2013 and is no longer current.



1 x 0,55" DLP Chip  
XGA 4/3 Ti Digital Light Processing Chip

Projector

2800  
15000:1 full on/off  
0,1867 min. Lumen

Screen

933 Lux (bei 200 cm Screen)  
15000:1 full on/off  
0,062 min. Lumen

Resolution XGA 1024 x 768  
786.432 Pixel  
UXGA 1600 x 1200 compressed  
Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p  
3D Compatibility Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom  
Frame Sequential (3D Ready)  
Application Standard-Portabel | External training and company presentations, as well as product presentations.  
Medium screen width or rooms with little light, max. 100 lumens.

Light Source 190W Lamp  
Light Life Articiel Nr.: RLC-078  
4500 h. 6000 h. in Eco Mode

Operating Costs 9,52% / 0,04 €

Focus Manual


Zoom Manual 1,24

Objective -

Throw Ratio 1,86-2,04:1

Audio 2 x 2W

Connections HDMI 1.4a in  
2 x D-sub 15 pin in 1 x out  
S-Video in  
Cinch Video in  
RS232C Din 9 pin in  
Mini Jack Audio in und out  
Mini USB in und out

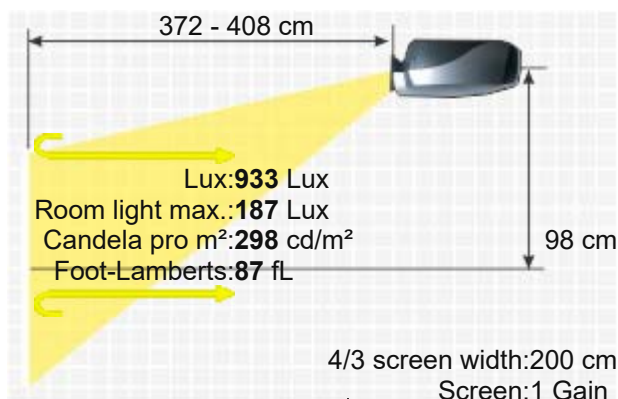



Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Yes  
250W  
268 x 84,4 x 221 mm (10,6"x3,3"x8,7") 4,98 L/dm³  
33 / 29 dB in Eco Mode

Weight  
Keystone  
Illumination

2,10 kg / 4,41 lbs.  
Vert.: +/-40°  
-

Frequenz

H-sync: 31-100 kHz  
V-sync: 50-120 Hz

Foot-Lamberts

87 fL / max. 461 cm screen width  
298 cd/m²

- Features
- Real Full HD 3D
  - Full HD 1080P compatible
  - Freeze
  - Blackboard Modus
  - Eco Mode
  - Kensington Slot
  - Gamma correction
  - Password protection
  - BrilliantColor™
  - Remote control with mouse control
  - 6-segment RGBCYW colour wheel

Optional

Lamp original RLC-078  
Remote control original A-00009441

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22409>  
2013 Discontinued (EOL) // Last update of the data: 2024-05-16  
Created: 2013-03-01 14:51:43

Data

More Details



# HCinema

<https://www.projector-database.com/pro/viewsonicpjd5232l-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.