

**Model Name****MW603 Digital Projector****Unique selling point**

- * SmartEco power saving technology
- * 3500 ANSI Lumens brightness
- * Up to 7,500 hours long lamp life
- * <0.5W standby mode


Trade Mark

Projection System	DLP	
Native Resolution	WXGA (1280 x 800)	
Brightness	3500AL	
FOFO Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.56-2.8, f=21-23.1mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.55-1.7 (90" @ 3m)	
Image Size (Diagonal)	60"~300"	
Zoom Ratio	1.1:1	
Lamp Type	240W	
Lamp Mode (Normal/Eco/SmartEco/LampSave)*	3000/4000/6000/7500 hours	
Keystone Adjustment	1D, Vertical +/- 40 degrees	
Projection Offset	100% ±5%	
Resolution Support	VGA(640 x 480) to WUXGA_RB (1920 x 1200) *RB = Reduced Blanking	
Horizontal Frequency	15~102KHz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
	3D Compatibility	Frame Sequential: Up to 60Hz 720p
	(Please refer to User's Manual for detailed support timing.)	Frame Packing: Up to 24Hz 1080p Side by Side: Up to 60Hz 1080i Top Bottom: Up to 60Hz 1080p
Interface	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x 1
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Speaker	2W
	USB (Type A)	x 1 (Power supply)
	USB (Type mini-B)	x 1 (Download & page up/down)
	RS232 (DB-9pin)	x 1
	IR Receiver	x 2 (Front & top)
Dimensions	Dimensions(W x H x D)	311 x 104 x 244 mm
Power	Weight	2.67 kg (5.9 lbs)
	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	Normal 303W, Eco 254W, Standby <0.5W
Audible Noise	33/30 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	Dynamic/Presentation/sRGB/Cinema/User 1/User 2	
Accessories	Standard	Optional
	Remote Control w/ Battery	Spare Lamp Kit
	Power Cord (by region)	Ceiling Mount
	User Manual CD	3D Glasses
	Quick Start Guide	Carry bag
	Warranty Card (by region)	
	VGA(D-sub 15pin) Cable	
	Lens cap	

*Lamp life results will vary depending on environmental

MW603 Digital Projector



Distance Chart

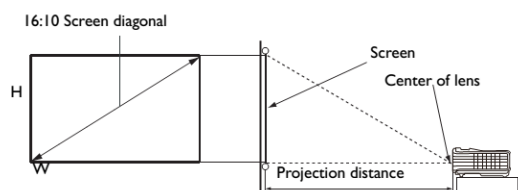

Screen size				Projection distance (mm)		
Diagonal		W (mm)	H (mm)	Min distance	Average	Max distance
Inch	mm			(max. zoom)		(min. zoom)
60	1524	1292	808	2000	2100	2200
70	1778	1508	942	2333	2450	2567
80	2032	1723	1077	2667	2800	2933
90	2286	1939	1212	3000	3150	3300
100	2540	2154	1346	3333	3500	3667
120	3048	2585	1615	4000	4200	4400
140	3556	3015	1885	4667	4900	5133
150	3810	3231	2019	5000	5250	5500
160	4064	3446	2154	5333	5600	5867
180	4572	3877	2423	6000	6300	6600
200	5080	4308	2692	6667	7000	7333
250	6350	5385	3365	8333	8750	9167
300	7620	6462	4039	10000	10500	11000

Ceiling Mount Chart

Ceiling Mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

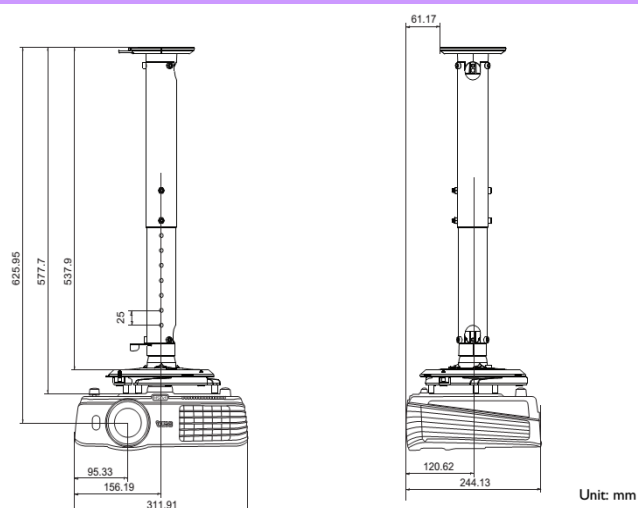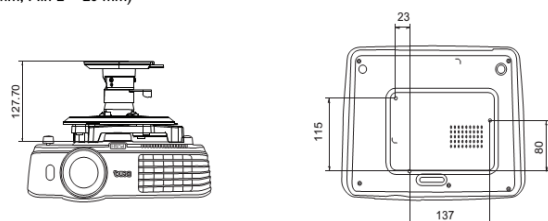

Unit: mm

Dimension



Unit: mm

