

Viewsonic PRO9510L

VIEWSONIC PRO9510L



A brief introduction to the PRO9510L: The Viewsonic stationary 3D DLP projector offers 6200 Ansi lumens, a contrast of 6000:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 6200 Ansi lumens, a picture width of 686 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 457 cm). With the HDMI MHL port, the smartphone image can be transmitted to the projector in Full HD at 60 Hz by screen mirroring and the smartphone is charged at the same time. The model is also compatible with Full HD 1080P and 3D. Even projection onto the ceiling is possible thanks to the 360° projection. The model was built by Viewsonic in 2017 and is no longer current.

Brief Introduction Beta 2.5

Display Type



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 6200

Screen 2067 Lux (bei 200 cm Screen)

Contrast

6000:1 full on/off

Screen 6000:1 full on/off

Black Level

1,0333 min. Lumen

Screen 0,345 min. Lumen

Lens shift

Vert.: +65,35% --51,8% Hori.: +/-3,8%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

370W Lamp

Articel Nr.: RLC-106

Light Life

1500 h. 3500 in Eco Mode

Operating Costs

7,62% / 0,25 €

Focus

Manual

Zoom

Manual 1,7

Objective

-

Throw Ratio


1,3-2,21:1

Audio

2 x 7W

Connections

2 x HDMI 1.4 mit MHL in
DVI-D in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in

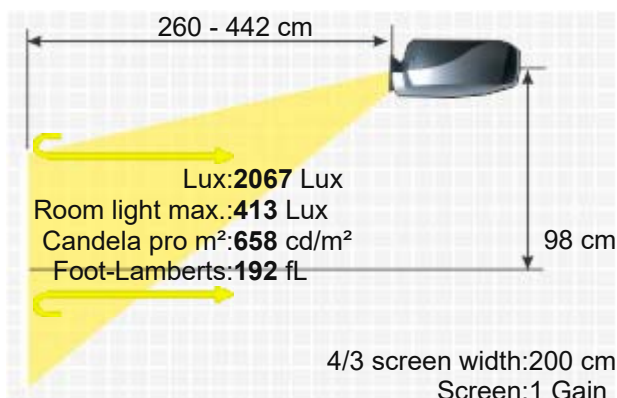

S-Video in
Mini Jack Audio in und out
USB Typ A,B in
RS232C Din 9 pin in
RJ45 in
12V Trigger out



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
480 / 380W in Eco Mode
445 x 147,8 x 325,5 mm (17,5"x5,8"x12,8") 21,26 L/dm³
31 dB in Eco Mode

Weight
Keystone
Illumination

8,29 kg / 18,28 lbs.
Vert.: +/-30°
Hori.: +/-25°
-

Frequenz
Foot-Lamberts

H-sync: 15-191,4 kHz
V-sync: 24-120 Hz
192 fL / max. 686 cm screen width
658 cd/m²


Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- Remote control with laser pointer und mouse control
- Lan network compatible.

Status

2017 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2017-02-07 16:10:53

Data

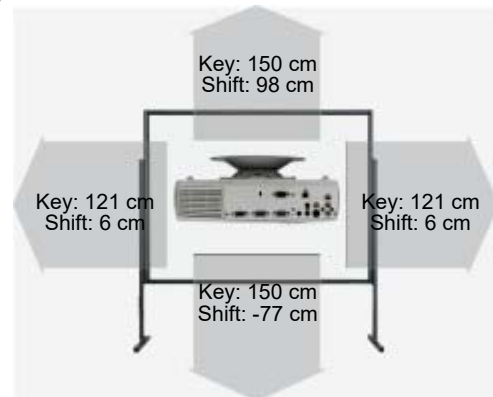

More Details



HCinema

<https://www.projector-database.com/pro/viewsonicpro9510l-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.