

Viewsonic Pro9800WUL

EAN/UPC:766907848212

VIEWSONIC PRO9800WUL



The Viewsonic Pro9800WUL stationary 3D DLP projector has 5500 Ansi lumens, a contrast of 15000:1 and a WUXGA 1920 x 1200 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 753 cm is possible, if the image width is smaller (we recommend max. 502 cm), rooms with residual light are also no problem. The HDMI MHL (Mobile High-Definition Link) port allows 1080p / 60 Hz image mirroring (screen mirroring) to be transmitted from the smartphone while it is being charged at the same time via the connection. The projector can also play 1080P and 3D without any problems. The model was built by Viewsonic in 2017 and is no longer current.



1 x 0,67" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector 5500

15000:1 full on/off

0,3667 min. Lumen

Vert.: +82% --49,1% Hori.: +/-10,3%

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

370W Lamp

Articel Nr.: RLC-106

1500 h. 3500 in Eco Mode

7,62% / 0,25 €

Manual

Manual 1,7

-

1,25-2,13:1


2 x 7W

2 x HDMI 1.4 mit MHL in
DVI-D in
2 x D-sub 15pin in 1 x out
Cinch Video in

Screen 2444 Lux (bei 200 cm Screen)

15000:1 full on/off

0,163 min. Lumen

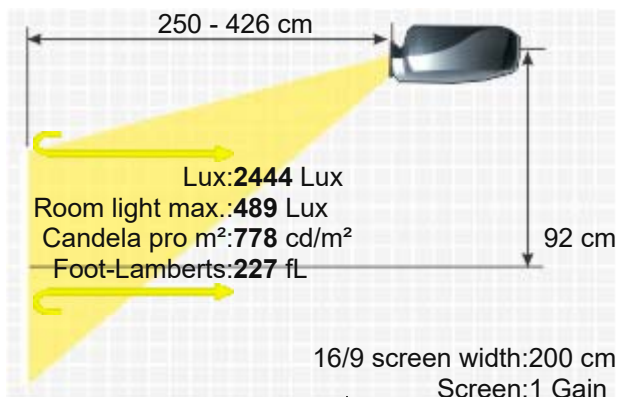

Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ A,B in
RS232C Din 9 pin in
RJ45 mit HDBaseT in
12V Trigger out



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
480 / 380W in Eco Mode
445 x 147,8 x 325,5 mm (17,5"x5,8"x12,8") 21,26 L/dm³
31 dB in Eco Mode

Weight
Keystone
Illumination

8,29 kg / 18,28 lbs.
Vert.: +/-30°
Hori.: +/-25°
-

Frequenz

H-sync: 15-191,4 kHz
V-sync: 24-120 Hz

Foot-Lamberts

227 fL / max. 753 cm screen width
778 cd/m²


Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Remote control with laser pointer und mouse control
- Lan network compatible.

Status

2017 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2017-02-07 15:03:16

Data

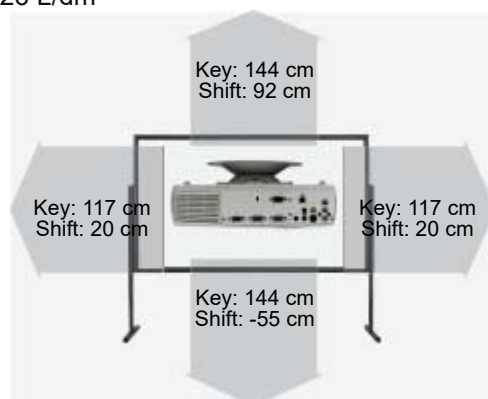

More Details



HCinema

<https://www.projector-database.com/pro/viewsonicpro9800wul-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.