

# Viewsonic PJD6383 /S

VIEWSONIC PJD6383 /S



The Viewsonic PJD6383 /S DLP projector has 3000 Ansi lumens, a contrast of 8000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 3500 hours, which is over 4.8 years with a daily viewing time of 2 hours. Thanks to the short-throw projection ratio of just 0.61:1, the projector does not stand still in the room. For a 2m wide image, the projector only needs to be 122 cm away from the screen. It is also Full HD 1080P compatible. The model was built by Viewsonic in 2012 and is no longer current, but is still one of the most popular projectors.

## Brief Introduction

Beta 2.5

## Display Type



1 x 0,55" DLP Chip  
XGA 4/3 Ti Digital Light Processing Chip

## Ansi-Lumen

Projector 3000

Screen 1000 Lux (bei 200 cm Screen)

## Contrast

8000:1 full on/off

8000:1 full on/off

## Black Level

Offset 0,3750 min. Lumen

0,125 min. Lumen

## Resolution

XGA 1024 x 768

786.432 Pixel

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

## Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

## Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Source

240W Lamp

Articel Nr.: RLC-071

## Light Life

3500 h. 5000 h. in Eco Mode

## Operating Costs

-

## Focus

Manual

## Zoom

No Zoom

## Objective

-

## Throw Ratio

0,61:1

## Audio

1 x 10W

## Connections

HDMI 1.3 in  
2 x D-sub 15 pin in 1 x out  
S-Video in  
Cinch Video in  
RS232C Din 9 pin in  
RJ45in

## Ceiling Mounting

Yes



Power 350 / 260W in Eco Mode  
Size WxHxD 294 x 84 x 242 mm (11,6"x3,3"x9,5") 5,98 L/dm³  
Operating Noise 33 / 29 dB in Eco Mode

Weight 2,99 kg / 6,59 lbs.  
Keystone Vert.: +/-40°  
Illumination -


Frequenz H-sync: 31-100 kHz  
V-sync: 48-120 Hz

Foot-Lamberts 93 fL / max. 477 cm screen width  
319 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- 6-segment RGBCYW colour wheel

Optional Lamp original RLC-071  
Remote control original A-00009442

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=20935>  
2012 Discontinued (EOL) // Last update of the data: 2023-08-04

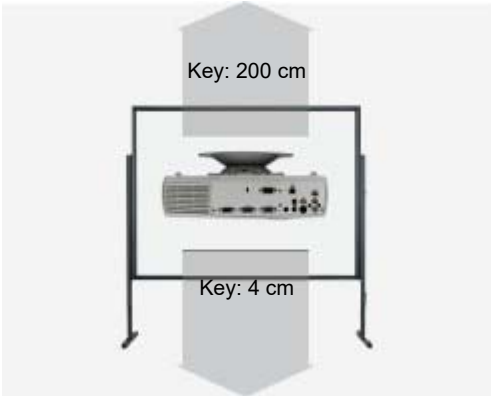

More Details



<https://www.projector-database.com/pro/viewsonikpjd6383s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.