

Vivitek DH559ST

VIVITEK DH559ST



Brief Introduction

Beta 2.5

The short-throw DH559ST 3D DLP has 3000 Ansi lumens, a contrast of 15000:1 and an HDTV 1920 x 1080 resolution. The lamp life is specified by the manufacturer as 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. As it is a short-throw projector, the projector can be placed very close to the wall. For a 2 m wide image, the projector only needs to be 138 cm away from the screen. A smartphone with MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). It is also Full HD 1080P and 3D compatible. The model was built by Vivitek in 2016 and is no longer current.

Display Type



1 x DLP Chip

HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector
3000

Screen
1333 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off

15000:1 full on/off

Black Level

Offset
0,2000 min. Lumen

0,089 min. Lumen

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190 / 160W im Eco Mode Lamp

Light Life

Articel Nr.: 5811118154-SVV

5000 h.

Operating Costs

-

Focus

Manual

Zoom

No Zoom 1,1

Objective

F=2,75 f=10,16-11,016 mm

Throw Ratio

0,691-0,76:1

Audio

2W

Connections


HDMI 1.4 mit MHL in
D-sub 15pin in und out
Mini Jack Audio in und out
mini USB in
RS232C Din 9 pin in

Ceiling Mounting

Yes

Power

240 / 200W in Eco Mode

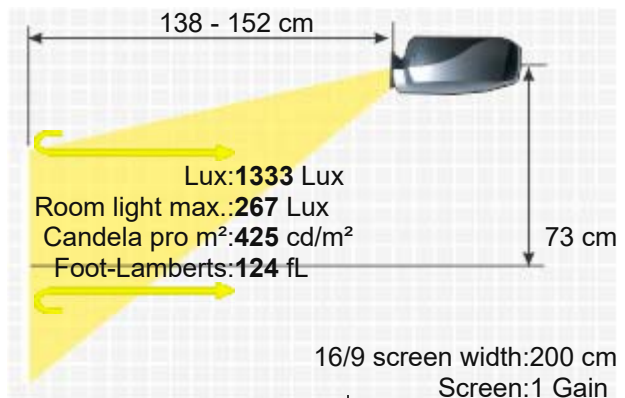

Size WxHxD 274,6 x 100 x 212 mm (10,8"x3,9"x8,3") 5,81 L/dm³
Operating Noise 34 / 31 dB in Eco Mode

Weight 2,30 kg / 5,07 lbs.
Keystone Vert.: +/-40°
Illumination -

Frequenz -

Foot-Lamberts 124 fL / max. 556 cm screen width
425 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Short-throw projector

Status 2016 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2016-05-02 11:24:19



More Details



HCinema

<https://www.projector-database.com/pro/vivitekDH559ST-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.