

Boxlight 3600A



Brief Introduction

Beta 2.5

A brief introduction to the Boxlight 3600A. The LCD projector has an SVGA 800 x 600 resolution and a contrast of 100:1. The projector can illuminate images up to 195 cm wide thanks to its 500 Ansi lumens. In room light, however, the image width should ideally be less than 130 cm. The projector was launched in 1997 and is no longer sold by the manufacturer. It should also be noted that, unfortunately, there are no longer any replacement lamps for the projector, neither originals nor replicas.



3 x LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

500 -

167 Lux (bei 200 cm Screen)

Contrast

100:1 full on/off

100:1 full on/off

Black Level

5,0000 min. Lumen

1,72 min. Lumen

Offset

-

Resolution

SVGA 800 x 600
480.000 Pixel

Video Modes

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC,

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

Light Source

250W Metalldampf Lamp
Articel Nr.: BOX3600-930

Light Life

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,6

Objective

F=2,5-3,2 f=47-75 mm

Throw Ratio

-

Audio

2 x 2W

Connections

D-sub 15 pin in
S-Video in
Cinch Video in
RS232C

Ceiling Mounting

Yes

Power

360W

Size WxHxD

296 x 149 x 460 mm (11,7"x5,9"x18,1") 20,29 L/dm³

Operating Noise

42dB

Weight

7,25 kg / 15,98 lbs.

Keystone

-

Illumination


-

Frequenz

H-sync: 15-58 kHz
V-sync: 50-75 Hz

Foot-Lamberts

15 fL / max. 195 cm screen width
51 cd/m²

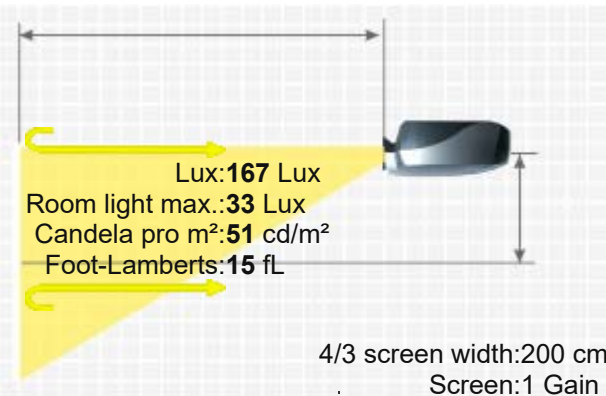

More Details



HCinema

<https://www.projector-database.com/pro/boxlight3600a-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.