

Vivitek D555

VIVITEK D555



Brief Introduction

Beta 2.5

A brief introduction to the Vivitek D555. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 15000:1. The lamp life is up to 5000 hours, which is over 6.8 years if enjoyed for two hours a day. An image width of up to 477 cm is possible as the projector has 3000 Ansi lumens. However, if room light is available, the picture should be max. 318 cm wide. The projector can also display 1080P and 3D without any problems. The model was built by Vivitek in 2013 and is no longer current.

Display Type



1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off

15000:1 full on/off

Black Level

0,2000 min. Lumen

0,067 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

-

Light Life

Articel Nr.: 5811118154-SVV

5000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,11

Objective

F=2,52-2,73 f=21,8-24,0 mm

Throw Ratio

1,92-2,14:1

Audio

2W Mono

Connections

HDMI 1.4 in

2 x D-sub 15pin in 1 x out


Cinch Video in

S-Video in

Mini Jack Audio in und out

USB in

RS232C Din 9 pin in

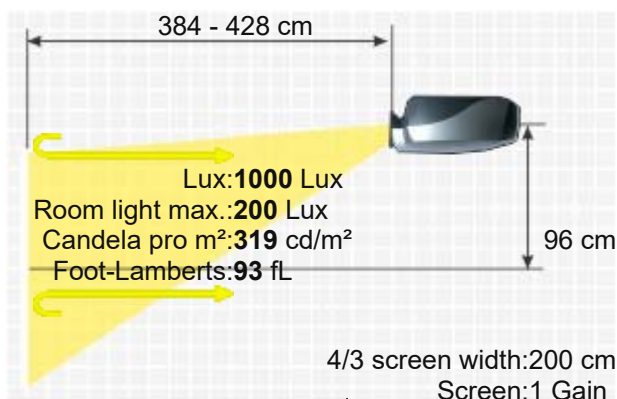

Ceiling Mounting Yes
Power 240 / 200W in Eco Mode
Size WxHxD 274, x 100 x 212 mm (10,8"x3,9"x8,3") 5,81 L/dm³
Operating Noise 35 / 32 dB in Eco Mode

Weight 2,30 kg / 5,07 lbs.
Keystone Vert.: +/-40°
Illumination 95%

Frequenz H-sync: 15,30-91,4 kHz
V-sync: 24-120 Hz

Foot-Lamberts 93 fL / max. 477 cm screen width
319 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Eco Mode
 - Kensington Slot
 - BrilliantColor™
 - Remote control with laser pointer

Optional Remote control original 5041849100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro21987>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/vivitek555-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.