

Vivitek D87ASTD



VIVITEK D87ASTD



With the D87ASTD, manufacturer Vivitek offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 3000:1. The lamp in the projector is specified with a lamp life of 4500 hours, which is over 6.2 years with a daily viewing time of 2 hours. 3000 Ansi lumens ensure that a picture width of 477 cm is also possible. However, if room light is available, the picture should be max. 318 cm wide. Video signals 1080P are also no problem for the projector. The model was built by Vivitek in 2013 and is no longer current.

Brief Introduction

Display Type

1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000 1000 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off 3000:1 full on/off

Black Level Offset

1,0000 min. Lumen 0,334 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Light Life

4500 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

1 x 10W

Connections

2 x HDMI 1.3 in
YUV in
S-Video in
Cinch Video in
Mini Jack Audio in
RS232C
RJ45 in
USB Typ A

Ceiling Mounting

Yes

Power

240 / 200W in Eco Mode

Size WxHxD

285 x 121,8 x 261 mm (11,2"x4,8"x10,3") 9 L/dm³

Operating Noise

35 / 32 dB in Eco Mode

Weight


2,70 kg / 5,95 lbs.

Keystone

-

Illumination

90%

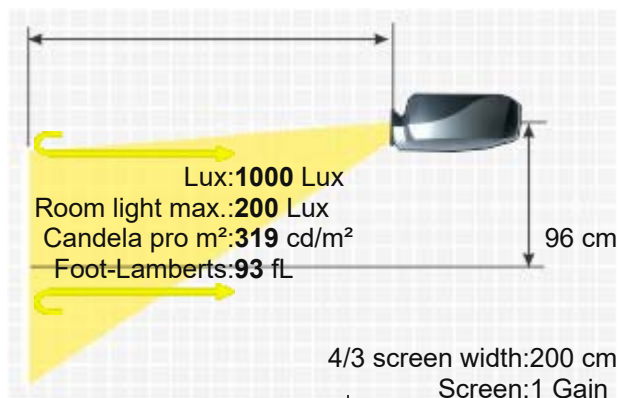

Frequenz	H-sync: 15,30-90 kHz V-sync: 43-85 Hz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode ■ BrilliantColor™ ■ Lan network compatible. ■ 6-segment RGBCYW colour wheel
Status	2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	Created: 2013-05-29 13:24:07

More Details



HCinema

<https://www.projector-database.com/pro/vivitek87astd-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.