

Boxlight 3650



Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Optional

The Boxlight 3650 Station LCD projector has 700 Ansi lumens, a contrast of 250:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of up to 230 cm well thanks to the 700 Ansi lumens. In room light, however, the image width should ideally be less than 153 cm. The model was built by Boxlight in 1999 and is no longer current.



3 x 1,3" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

700

250:1 full on/off

2,8000 min. Lumen

Screen

226 Lux (bei 203 cm Screen)

250:1 full on/off

0.915 min. Lumen

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

NTSC, NTSC 4.3, PAL, PAL-M, SECAM, HDTV (480p, 720p, 1080i, 1035i

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

Articel Nr.: BOX6000-930

3000 h.

-

Powered

Powered 1,6

F=1,85-2,95

-

2 x 2W Stereo

Computer Input:

HDB15 Terminal

Computer Out HDB15 (1)

Computer Audio In Mini Stereo (2)

Computer Control Port Multipole 12 Pin (2)

AV Input RCA (1) Composite Video

S-Video (1)

RCA L/R (2)

AV Output RCA (1)

RCA L/R (2)

Yes

-

-

-

5,80 kg / 12,79 lbs.

-

-

-

21 fL / max. 230 cm screen width

72 cd/m²


-

Osram bulb only

Lamp ruby

NLMP644

Ruby-LMP644

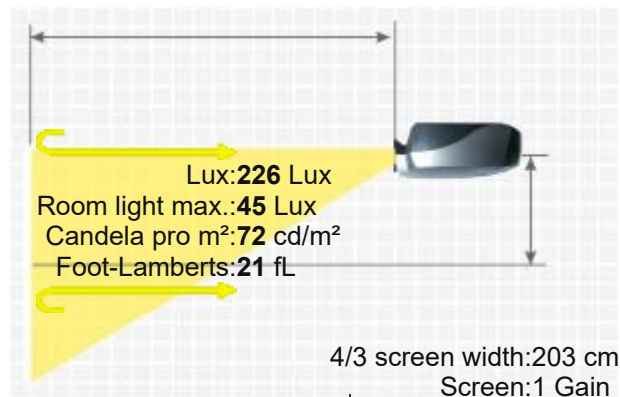

Lamp original

BOX6000-930

Compatible lamp

LMP-K633

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n633>

1999 Discontinued (EOL) // Last update of the data: 2023-09-07

Status
Data



HCinema

<https://www.projector-database.com/pro/boxlight3650-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.