

Boxlight CD 760X



BOXLIGHT CD 760X



Brief Introduction

Beta 2.5

Display Type



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2600

867 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,3000 min. Lumen

0,434 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

250W VIP Lamp

Articel Nr.: CD727X-930

Light Life

2000 h.

Operating Costs

11,9% / 0,05 €

Focus

Manual

Zoom

Manual 1,22

Objective

-

Throw Ratio

-

Audio

1 x 2W

Connections

DVI-I
D-sub 15pin in und out
Cinch Video in
S-Video in
Mini Jack
RS232C

Ceiling Mounting

Yes

Power

-

Size WxHxD

327,7 x 88,9 x 238,8 mm (12,9"x3,5"x9,4") 6,85 L/dm³

Operating Noise

36dB

Weight

3,54 kg / 7,8 lbs.

Keystone

Vert.: +/-15°

Illumination

-

Frequenz


H-sync: 31-70 kHz
V-sync: 50-85 Hz

Foot-Lamberts

81 fL / max. 444 cm screen width
278 cd/m²

Features

-

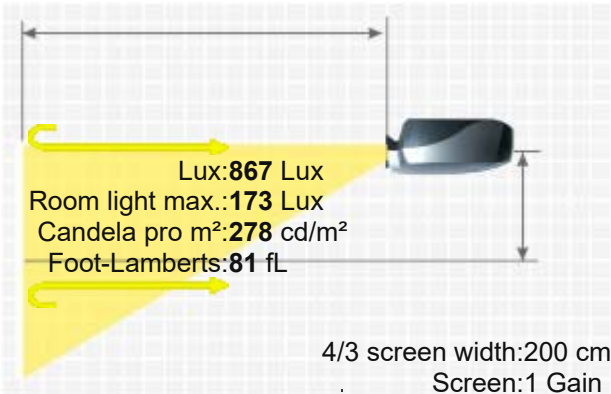

Optional

Osram bulb only
Lamp original

NLMP15627
CD727X-930

Status Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15627>
2005 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/boxlightcd760x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.