


Model	MP75E
Technology	.79" 3LCD 
Brightness	5000 Lumens (standard) 4000 Lumens (economy)
Native Resolution	1024 x 768 (XGA)
Supported Resolution	1600 x 1200 (UXGA)
Colors	16.7 Million
Brightness Uniformity	85%<
Projection Methods	Tabletop front/rear; Ceiling front/rear
Contrast Ratio	600:1
Aspect Ratio	Native 4:3; Compatible 16:9, 16:10
Image Size	40 in to 300 in / 1.02 m to 7.6 m
Projection Distance	4 ft to 36 ft / 1.22 m to 10.97 m
Lens	Manual zoom and focus
Keystone Correction	Vertical +/- 30 degrees
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120Hz
Audio Output	1 x 8W mono speaker
Lamp	330W (standard) / 264W (economy)
Lamp Life	2000 (standard) / 3000 (economy)
Remote Control	Multi-function IR remote with laser pointer
Noise Level	38dB (standard) / 34dB (economy)
Power Supply	AC Input 100–240V
Power Consumption	450W <1W in standby mode
Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized; VESA standards; PC and Macintosh compatible
Video Compatibility	EDTV (480p), HDTV (720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	Component (RCA x3) DVI-I, VGA-in, composite video, S-video, RCA stereo audio-in (x2), mini-jack audio-in (x2), USB for mouse control, VGA-out, mini-jack audio-out
Service and Network Control	RS232X, RJ45
Weight	16.7 lbs / 7.6 kg with lens
Dimensions (W x H x D)	18.9 in x 6.1 in x 14.4 in / 48 cm x 15.5 cm x 36.6 cm
Throw Ratio	1.5 - 1.8:1
Standard Accessories	AC power cord, VGA cable, USB cable, remote control with batteries, user manual (CD)
Optional Accessories	Replacement remote control, harsh environment filter component, video cable, DVI-D cable, ceiling mount, S-video cable, carrying case




* Shown with lens

Key Features

Five auto features (Auto search, Auto sync, Auto ceiling, Auto keystone and Auto filter alert)
 5000 lumens
 Email Monitoring
 Robust input panel
 Optional harsh environment filter
 RJ45 network ready
 Side changing lamp and filter

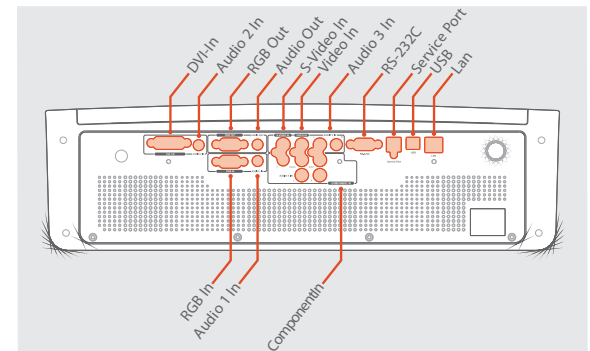

Throw Distance (ft)

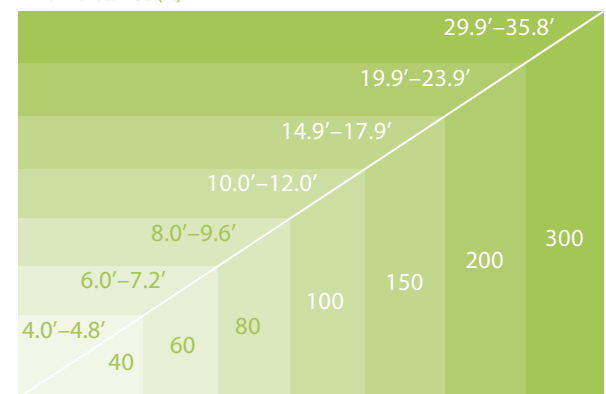

Diagonal Image Size (in)

Award Winning Technical Support 24/7/365

And, of course, all BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2012 BOXLIGHT, Inc. Specifications subject to change without notice.
 Helps meet ADA Section 508 compliance
 BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528

Lamps4Life
Eligible