

Boxlight Pro3500



Pro3500p



The Pro3500 LCD has 3500 Ansi-Lumen, a contrast of 800:1 and an XGA 1024 x 768 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 3500 Ansi lumens ensure that a picture width of 515 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. The projector was launched in 2006 and is no longer sold by the manufacturer.

 3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector	3500 / 2800 im Eco Mode	Screen	1167 Lux (bei 200 cm Screen)
Contrast	800:1 full on/off		800:1 full on/off
Black Level	4,3750 min. Lumen		1,464 min. Lumen

Lens shift
Vert.: +50% -0% motorisch
XGA 1024 x 768

Resolution
786.432 Pixel
UXGA 1600 x 1200 compressed

Video Modes
NTSC/PAL(-BGDHI), SECAM, PAL M, N, NTSC4.43, PAL60525i(480i), 525p(480p), 625i(575i),
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Application
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source
275W UHB Lamp
Articel Nr.: MP57i-930
Light Life
2000 h.

Operating Costs
-

Focus
Powered

Zoom
Powered 1,48

Objective
F=1,7-2,4 f=31-46 mm

Throw Ratio
1,5-2,3:1

Audio
2 x 1W Stereo

Connections
M1-DA (DVI) in
D-sub 15p in und out
5 x BNC RGBHV in
Cinch Stereo in
Cinch Video in
S-Video in
Mini Jack in
RS232C
RJ45




Ceiling Mounting
Yes

Power
430W

Size WxHxD
419 x 160 x 320 mm (16,5"x6,3"x12,6") 21,45 L/dm³

Operating Noise
39 / 35 dB in Eco Mode

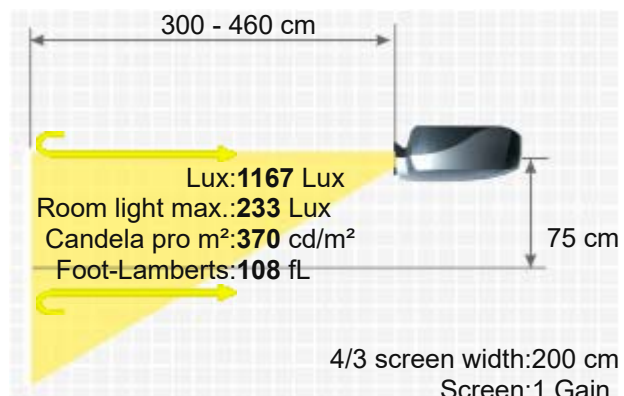

Key: 80 cm
Shift: 75 cm


Weight 7,71 kg / 17 lbs.
 Keystone Vert.: +/-15°
 Illumination Hori.: +/-5°
 80%
 Frequenz H-sync: 15-91 kHz
 V-sync: 50-120 Hz
 Range max.: 135 MHz
 Foot-Lamberts 108 fL / max. 515 cm screen width
 370 cd/m²

- Features
 - Lens shift Funktion motorisch
 - Freeze
 - User logo
 - Eco Mode
 - Kensington Slot
 - Picture-in-Picture
 - Lan network compatible.
 - digital zoom
 - pin code security system
 - de-interlacer

Optional

Lamp ruby	Ruby-LMP15630
Lamp original	Pro3500-930

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d15630>

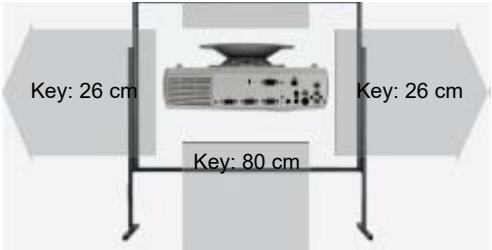

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
SL502	1.12-1.51:1	2.2-3 m	50%		Powered
LL503	2.25-4.13:1	4.5-8.3 m	50%		Powered
FL501	0.79-0.79:1	1.6-1.6 m	0.0% Fix		Powered
LL504	3.96-7.26:1	7.9-14.5 m	50%		Powered

Status Data 2006 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/boxlightpro3500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.