


Boxlight Pro5501DP



BOXLIGHT PRO5501DP



Brief Introduction

Beta 2.5

A brief introduction to the Boxlight Pro5501DP. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 1000:1. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 646 cm is possible as the projector has 5500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 431 cm is recommended. This model is no longer offered by Boxlight. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

5500 / 3500 im Eco Mode

1833 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

5,5000 min. Lumen

1,839 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

280 / 230W im Eco Mode Lamp

Articel Nr.: PRO5500DP-930

Light Life

2000 h. 3000 h. in eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,32

Objective

F=1,7 f=19-26 mm 34

Throw Ratio

1,78-2,35:1

Audio

2 x 3W

Connections

HDMI
DVI-D mit HDCP in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in
Cinch Stereo in
USB
RS232C
RJ45 in

Ceiling Mounting

Yes

Power

650W

Size WxHxD


505 x 192 x 385 mm (19,9"x7,6"x15,2") 37,33 L/dm³

Operating Noise

35 / 33 dB in Eco Mode


Weight

20,50 kg / 45,19 lbs.

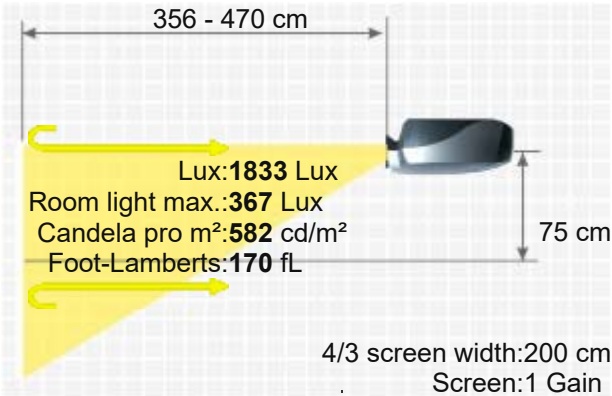

Keystone
Illumination
Frequenz
Foot-Lamberts
Features

Vert.: +/-40°
Hori.: +/-35°
-
H-sync: 15-90 kHz
V-sync: 50-85 Hz
170 fL / max. 646 cm screen width
582 cd/m²
■ Lens shift Funktion
■ Eco Mode
■ Lan network compatible.
■ 4-segment colour wheel.

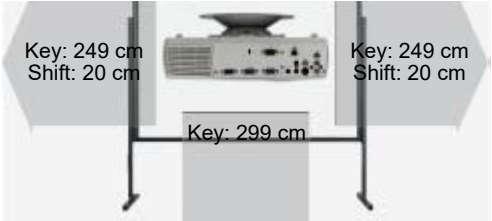

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
long zoom 2 lens	4.43-8.3:1	8.9-16.6 m	50%	+/-10%	Powered
long zoom 1 lens	2.22-4.43:1	4.4-8.9 m	50%	+/-10%	Powered
Fix Optional Lenses					
fixed	0.77:1	1.5 m	0.0% Fix		No Zoom
Status Data	2010 Discontinued (EOL) // Last update of the data: 2023-08-04				

More Details



HCinema

<https://www.projector-database.com/pro/boxlightpro5501dp-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.