

Boxlight TraveLight2



Brief Introduction

Beta 2.5

The micro-portable TraveLight2 DLP has 2100 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 399 cm is possible as the projector has 2100 Ansi lumens. However, if room light is available, the picture should be max. 266 cm wide. This model is no longer offered by Boxlight. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

2100

700 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,0500 min. Lumen

0,351 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Micro-Portabel | Mobile presentations and external training.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

165W VIP Lamp

Articel Nr.: TRAVELIGHT-930

Light Life

1500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective


-

Throw Ratio

-

Audio

1 x 0,5W

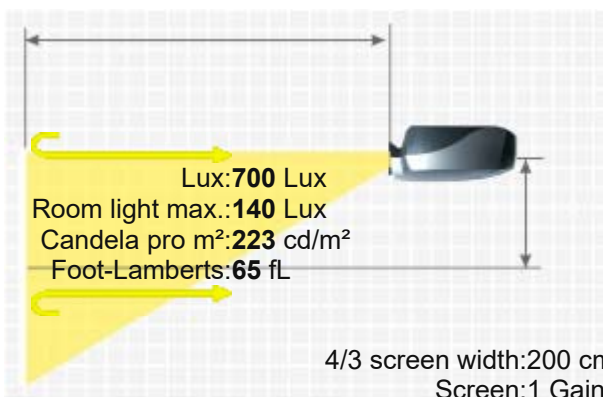

Connections



Ceiling Mounting

Yes

Power

220W

Size WxHxD

177,8 x 57,2 x 162,2 mm (7"x2,3"x6,4") 1,63 L/dm³

Operating Noise

35dB

Weight

1,13 kg / 2,49 lbs.

Keystone

Vert.: +/-15°

Illumination

-

Frequenz	H-sync: 31-90 kHz V-sync: 43-85 Hz
Foot-Lamberts	65 fL / max. 399 cm screen width 223 cd/m²
Features	-
Status	2007 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/boxlighttravelight2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.