

Butterfly CB08

BUTTERFLY CB08



Lcos Panel
SVGA 4/3 Liquid Crystal on Silicon (LCOS)

Projector

45
-
-
-

Screen

15 Lux (bei 200 cm Screen)
-
-

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

SVGA 800 x 600

480.000 Pixel

PAL, SECAM, NTSC,

Game-Portabel | Very portable, small-screen projections.

Very narrow picture width and rooms with very little light.

RGB LED

-

0,00 € LED

Manual

No Zoom

-

-

1 x 2W

-

-

-

81 x 30,5 x 81 mm (3,2"x1,2"x3,2") 0,2 L/dm³

-

-

-

-

-


1 fL / max. 58 cm screen width

3 cd/m²

■ SD Card Slot

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

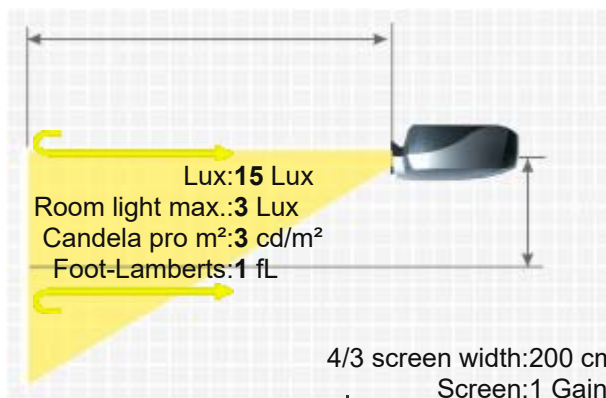

HCinema

<https://www.projector-database.com/pro/butterflycb08-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.