

Canon LCV 6360



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

The standard portable LCV 6360 LCD projector from Canon has 3500 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. An image width of up to 515 cm is possible as the projector has 3500 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 343 cm is recommended. The model is no longer offered by Canon.



3 x 0,79" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

Projector

3500

450:1 full on/off

7,7778 min. Lumen

Screen

1167 Lux (bei 200 cm Screen)

450:1 full on/off

2,611 min. Lumen

XGA 1024 x 768

786.432 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

200W UHP Lamp

-

-

Manual

Manual 1,2

F=1,7-2,15 f=26,6-32 mm

1,66-1,99:1

1W Mono

D-sub 15 pin in und out

S-Video in

Cinch Video in

1 x USB Type B

1 x RS-232C

Yes

270W

-

-

-

-

-


-

108 fL / max. 515 cm screen width

370 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

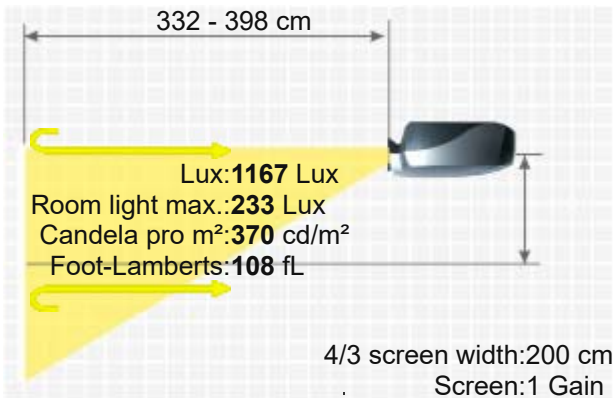

More Details



HCinema

<https://www.projector-database.com/pro/canonlcv6360k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.