

ChiStar CX 765



CHISTAR CX 765



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

A brief introduction to the ChiStar CX 765. The standard portable DLP projector has an SVGA 800 x 600 resolution and a contrast of 2600:1. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. 2800 Ansi lumens ensure that a picture width of 461 cm is also possible. However, if room light is available, the picture should be max. 307 cm wide. The model is no longer offered by ChiStar.



1 x DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Projector

2800

2600:1 full on/off

1,0769 min. Lumen

Screen

933 Lux (bei 200 cm Screen)

2600:1 full on/off

0,359 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W Lamp

2000 h.

-

Manual

Manual

-

-

-

DVI

D-sub 15pin in und out

Cinch Video in

S-Video in

Yes

-

328 x 88 x 238 mm (12,9"x3,5"x9,4") 6,87 L/dm³

36dB

3,50 kg / 7,72 lbs.

Vert.: +/-15°

Hori.: +/-10°

80%

H-sync: 15-100 kHz

V-sync: 43-120 Hz


Range max.: 230 MHz

87 fL / max. 461 cm screen width

298 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

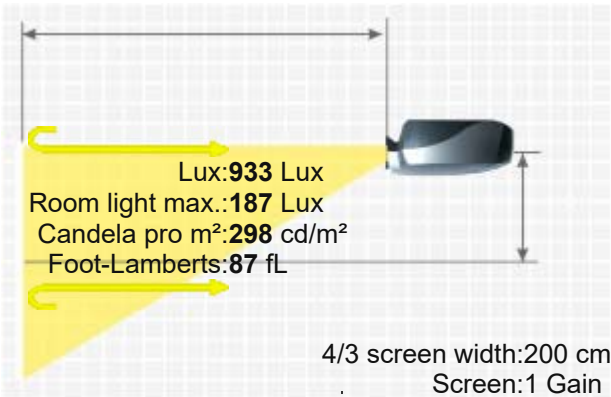

More Details



HCinema

<https://www.projector-database.com/pro/chistarcx765-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.